


# Smart Cyber Infrastructure for Big Data Processing

## Cees de Laat

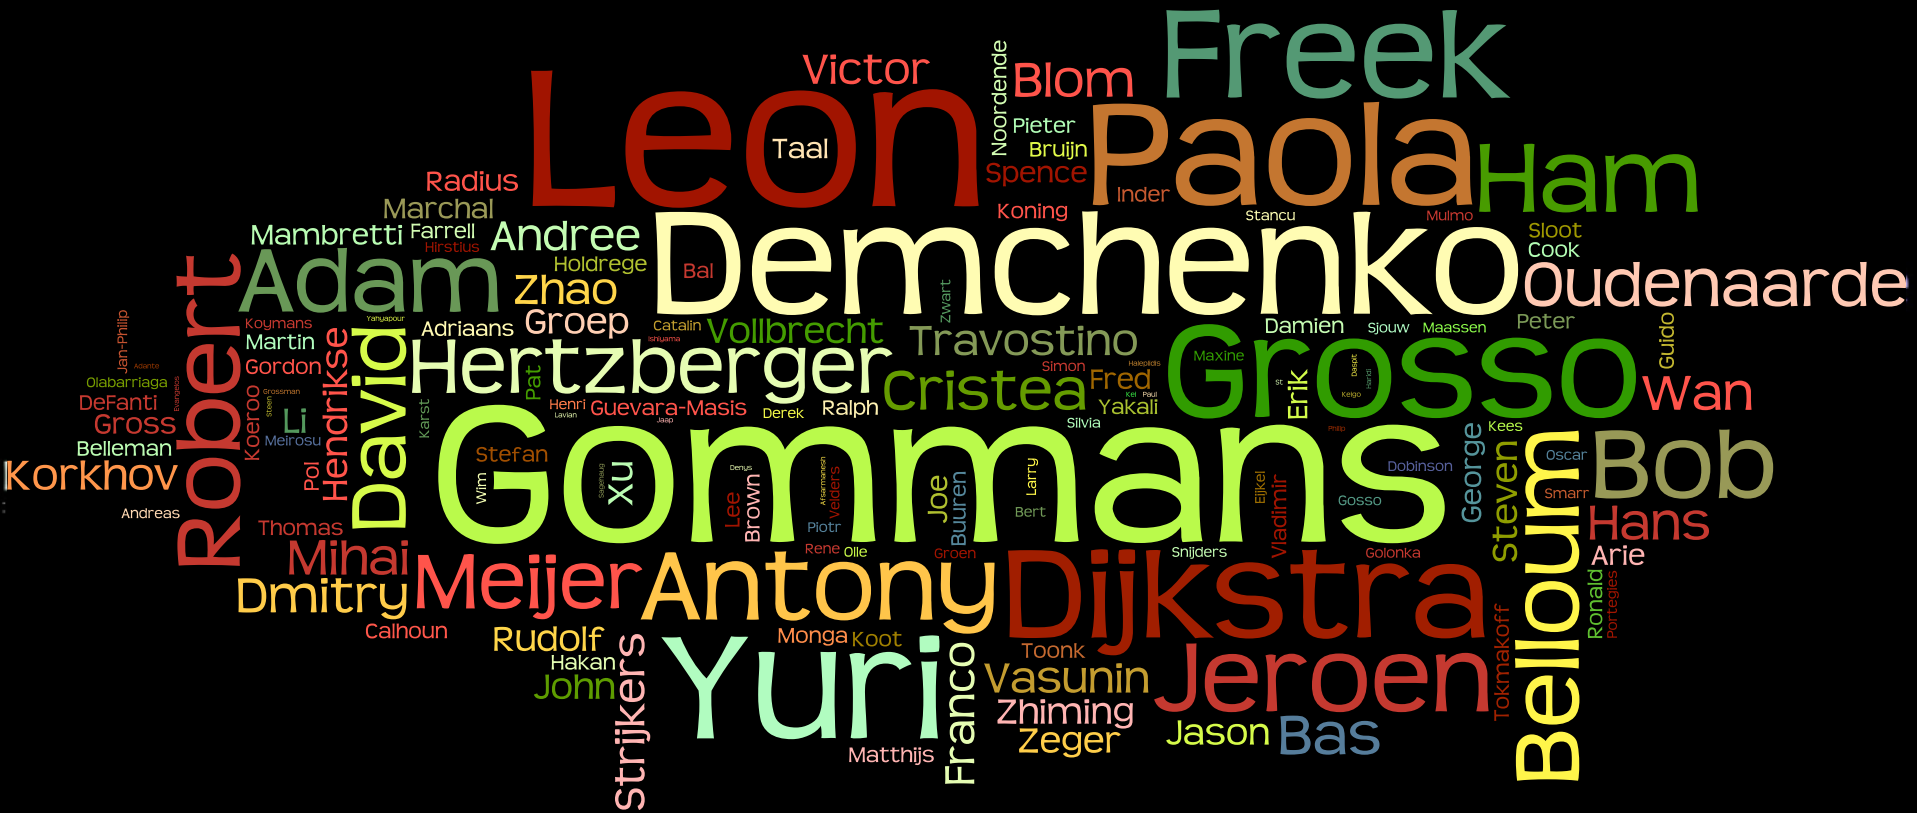

# Science Faculty @ UvA

## Informatics Institute



- AMLAB: Machine Learning (Prof. dr. M. Welling)
- FCN: Federated Collaborative Networks (Prof. dr. H. Afsarmanesh)
- ILPS: Information and Language Processing Systems (Prof. dr. M. de Rijke)
- ISIS: Intelligent Sensory Information Systems (Prof. dr. ir. A.W.M. Smeulders)
- CSL: Computational Science Laboratory (Prof. dr. P.M.A. Sloot)
- SNE: System and Network Engineering (Prof. dr. ir. C.T.A.M. de Laat)
- TCS: Theory of Computer Science (Prof. dr. J.A. Bergstra)




# SNE - Staffing

*Group leader: prof.dr.ir. C. de Laat*

*Deputy group leaders: dr. Andy Pimentel, dr. Paola Grosso*

- 1 full prof (CdL)
- 2 part time professors
- 3 endowed professors
- 2 *senior researchers*
- 1 associate prof
- 4 assistant professors
- ~12 postdoc's
- *About 15 phd students*
- ~10 guests
- *Yearly turnover ~ 3,5 MEuro*

When top level guys look down they see only shit.

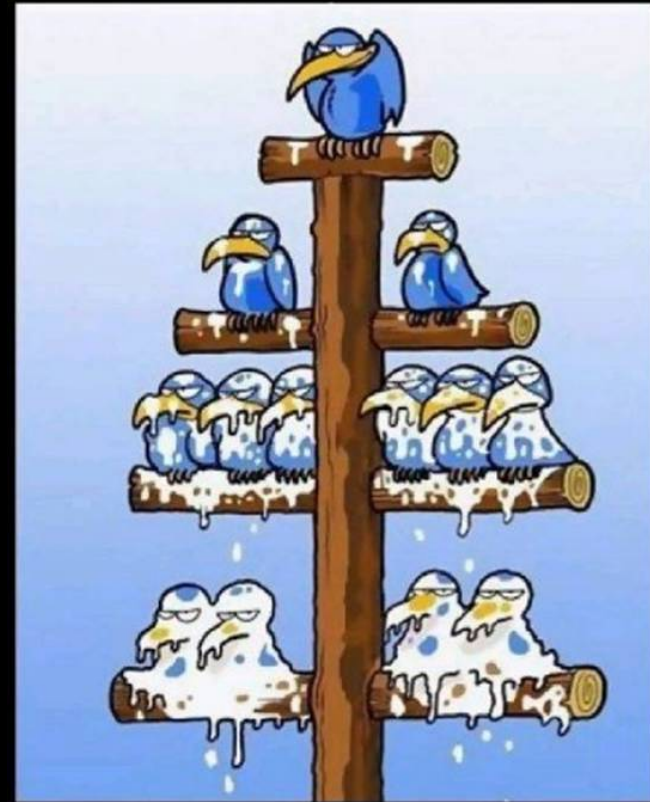


When bottom level guys look up they see only assholes.



# Reduction of Complexity by Integration

By combining services such as telephony, television, data, and computing capacity within a single network, we can cut down on complexity, energy consumption and maintenance.

- How can we describe and analyze complex information systems effectively?
- How can we specify and measure the quality and reliability of a system?
- How can we combine various different systems?
- How can we design systems in which separate processors can co-operate efficiently via mutual network connections within a much larger whole?
- Can we design information systems that can diagnose their own malfunctions and perhaps even repair them?
- How can we specify, predict, and measure system performance as effectively as possible?

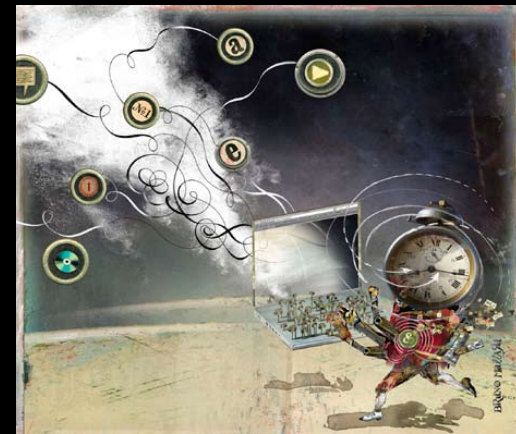

# Mission

*Can we create smart and safe data processing systems that can be tailored to diverse application needs?*

- *Capacity*
  - *Bandwidth on demand, QoS, architectures, photonics, performance*
- *Capability*
  - *Programmability, virtualization, complexity, semantics, workflows*
- *Security*
  - *Anonymity, integrity of data in distributed data processing*
- *Sustainability*
  - *Greening infrastructure, awareness*
- *Resilience*
  - *Systems under attack, failures, disasters*




# Mission

*Can we create smart and safe data processing systems that can be tailored to diverse application needs?*

- **Capacity**
  - *Bandwidth on demand, QoS, architectures, photonics, performance*
- **Capability**
  - *Programmability, virtualization, complexity, semantics, workflows*
- **Security**
  - *Anonymity, integrity of data in distributed data processing*
- **Sustainability**
  - *Greening infrastructure, awareness*
- **Resilience**
  - *Systems under attack, failures, disasters*



# ATLAS detector @ CERN Geneve

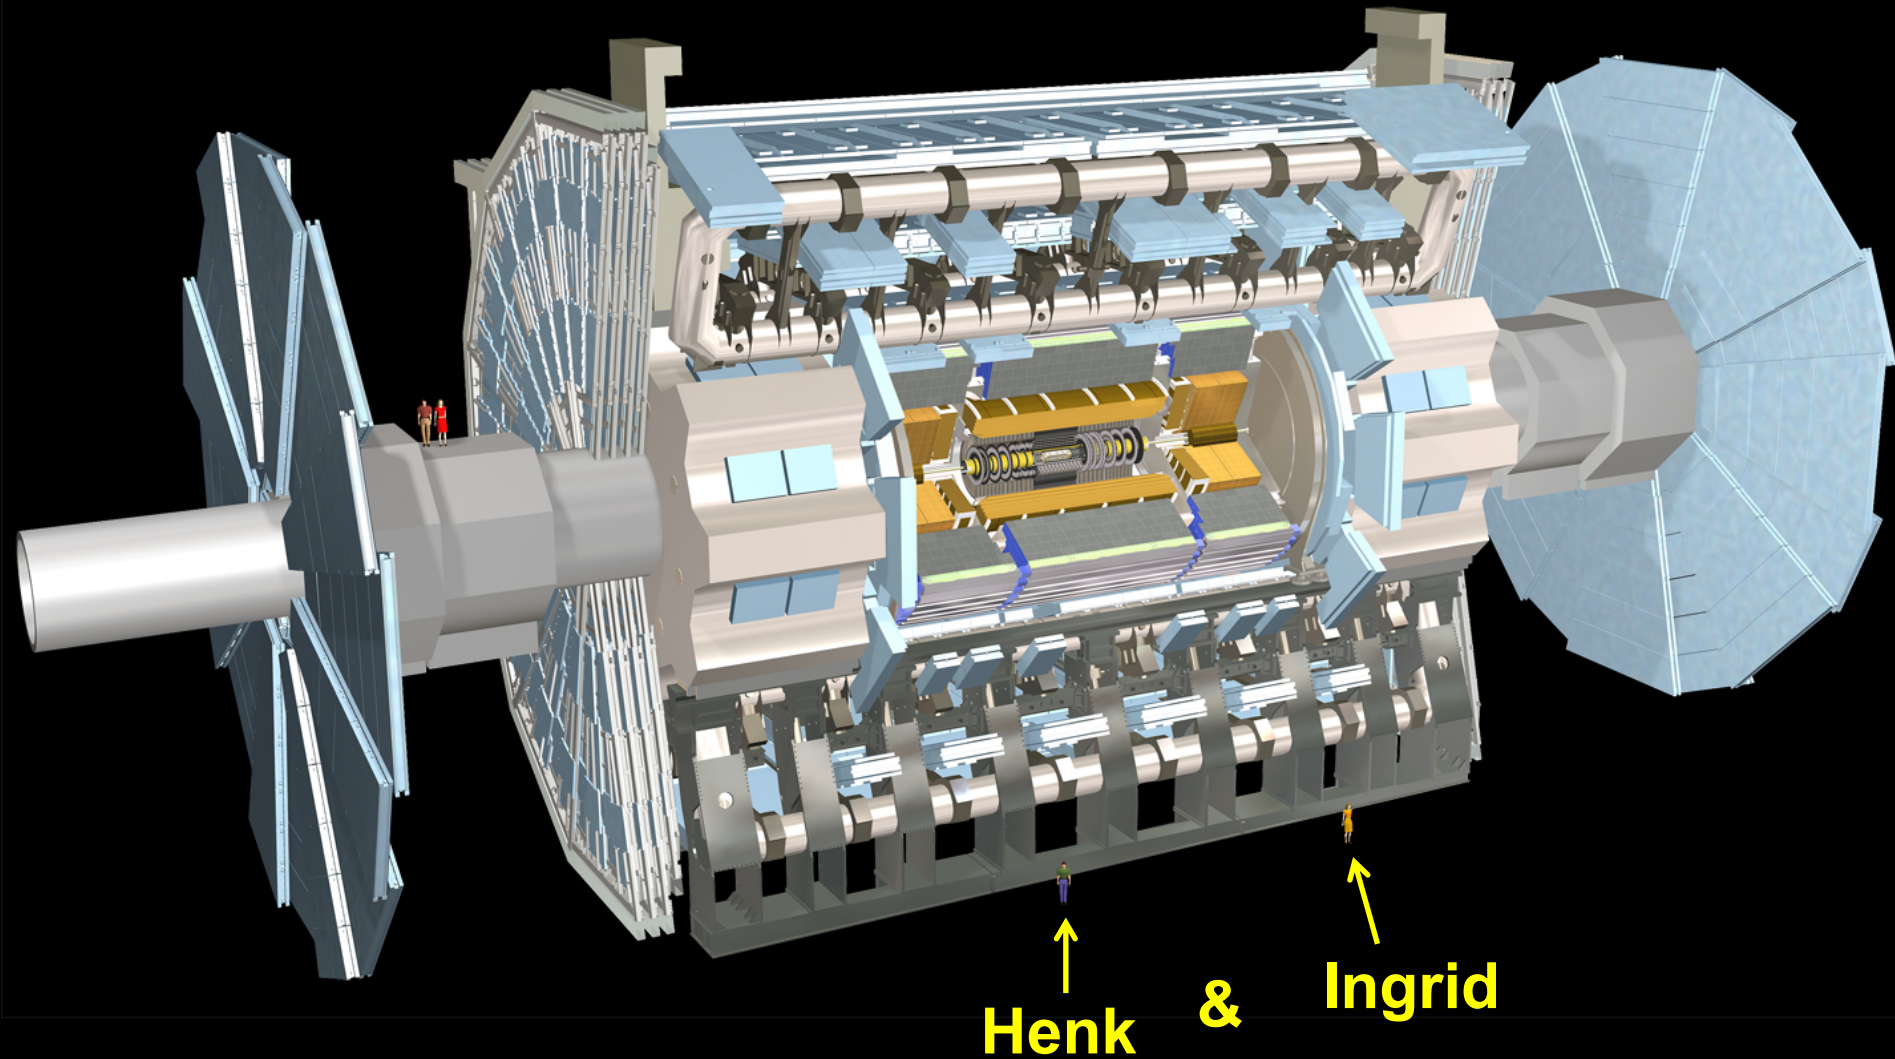




# What Happens in an Internet Minute?



## And Future Growth is Staggering



There  
is  
always  
a  
bigger  
fish

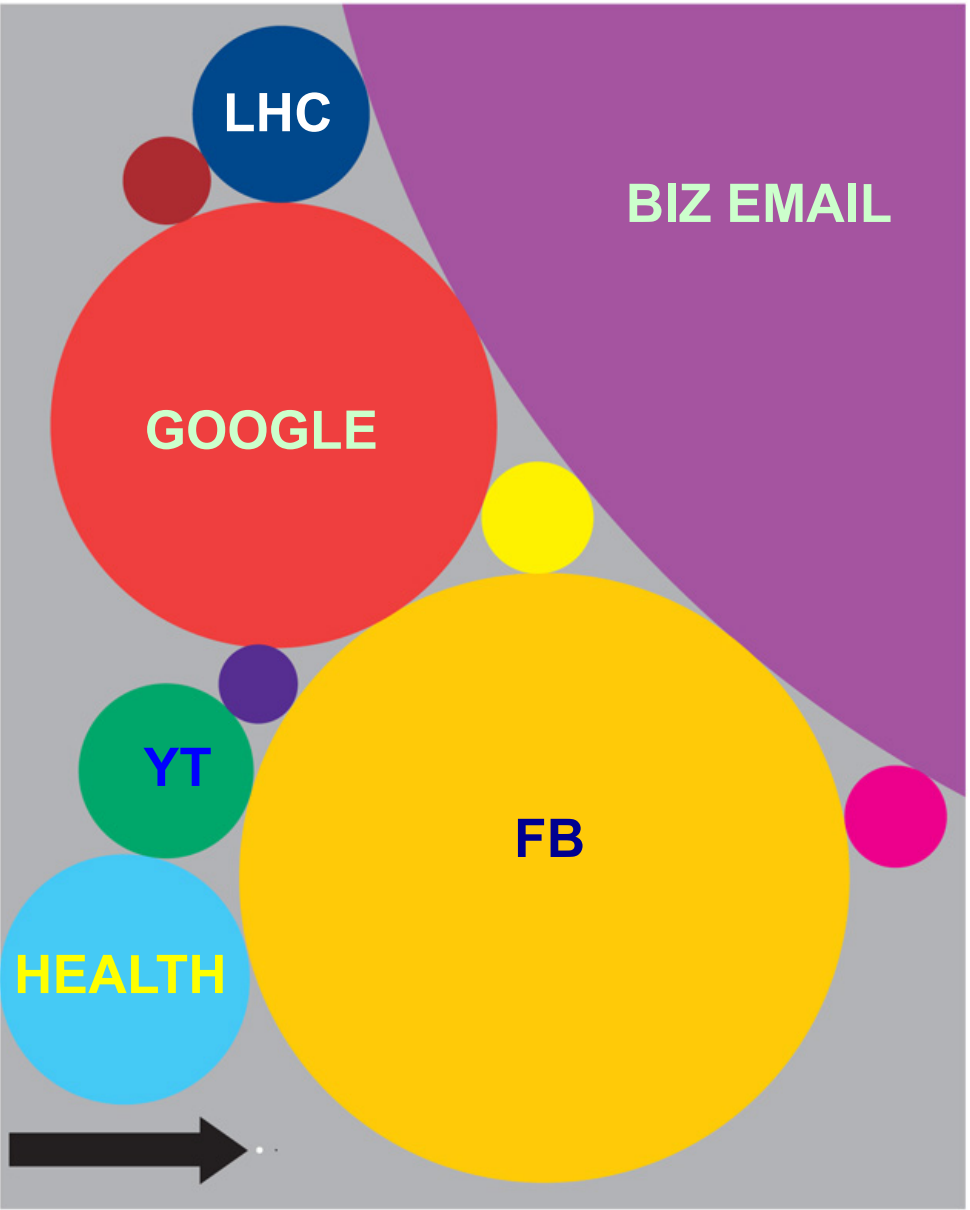

Size of data sets in terabytes



Business email sent per year	2,986,100	National Climactic Data Center database	6,144
Content uploaded to Facebook each year	182,500	Library of Congress' digital collection	5,120
Google's search index	97,656	US Census Bureau data	3,789
Kaiser Permanente's digital health records	30,720	Nasdaq stock market database	3,072
Large Hadron Collider's annual data output	15,360	Tweets sent in 2012	19
Videos uploaded to YouTube per year	15,000	Contents of every print issue of WIRED	1.26

... more data!

# Internet developments

Google

DATA



... more realtime!



twitter



myspace  
a place for freedom



SchoolBANK

Linked in



Hyves

flickr  
from YAHOO!



... more users!





... more data!

Internet developments

Google

Speed  
Volume

DATA



Deterministic

Real-time



twitter



Scalable

Secure

Linked in



myspace  
SchoolBANK

Hyves

flickr






facebook

... more users!



# Multiple colors / Fiber

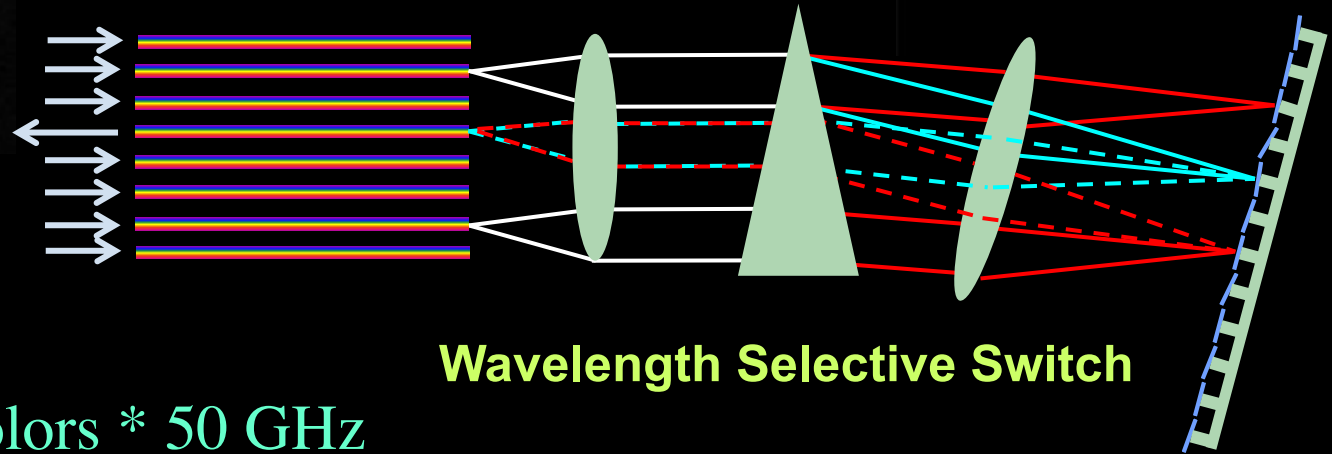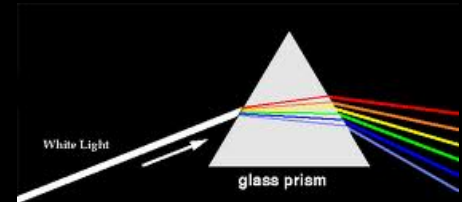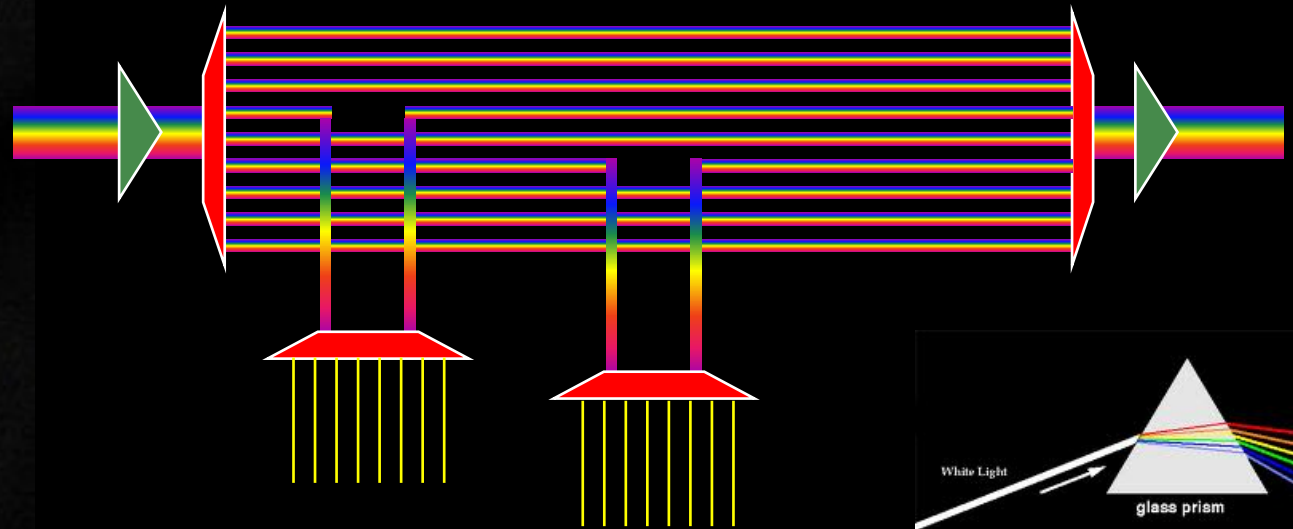

**Wavelength Selective Switch**

Per fiber:  $\sim 80-100$  colors \* 50 GHz  
Per color: 10 – 40 – 100 Gbit/s  
BW \* Distance  $\sim 2 \cdot 10^{17}$  bm/s

New: Hollow Fiber!

→ less RTT!



# Wireless Networks



## Digital technology reviews

Tech XO provided latest Digital Technology reviews like digital camera, digital lens reviews, digital camera

[HOME](#)[CONTACT US](#)[PRIVACY POLICY](#)

You Are Here : [Digital Technology Reviews](#) » [Network Devices](#) » Next Generation Wireless LAN Technology 802.11ac 1 Gbps throughput with

SEP  
06

### Next Generation Wireless LAN Technology 802.11ac 1 Gbps throughput with


Published By [admin](#) under [Network Devices](#) Tags: [1gbps throughput](#), [1gbps wireless](#), [1gbps wireless lans](#), [generation](#), [new generation](#), [technologies](#), [technology](#), [throughput](#), [wireless](#), [wireless lan](#)

WiFi is one of the most preferred communication

protocol LAN due to the easy comparison and convenience in the **digital home**. While consumer PC products has just started to migrate to a much higher bandwidth of 802.11n wireless LAN now working on next-generation standard definition is already in progress.



# Wireless Networks

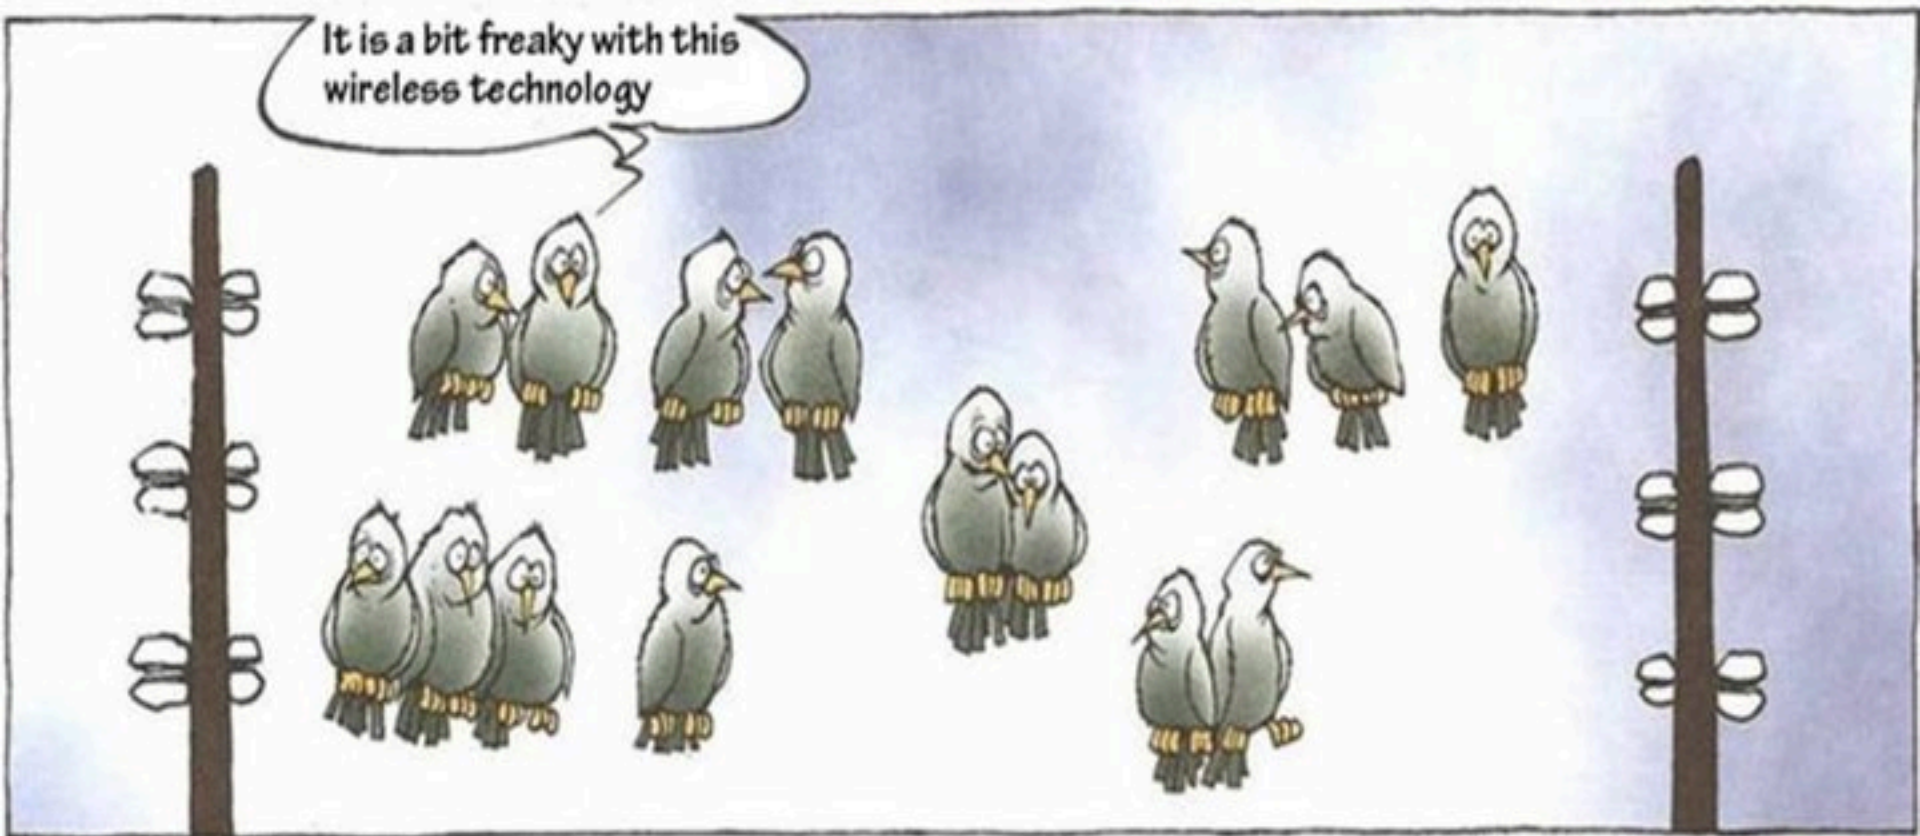


COPYRIGHT : MORTEN INGEMANN

protocol LAN due to the easy comparison and convenience in the **digital home**. While consumer PC products has just started to migrate to a much higher bandwidth of 802.11n wireless LAN now working on next-generation standard definition is already in progress.



# GPU cards are disruptive!

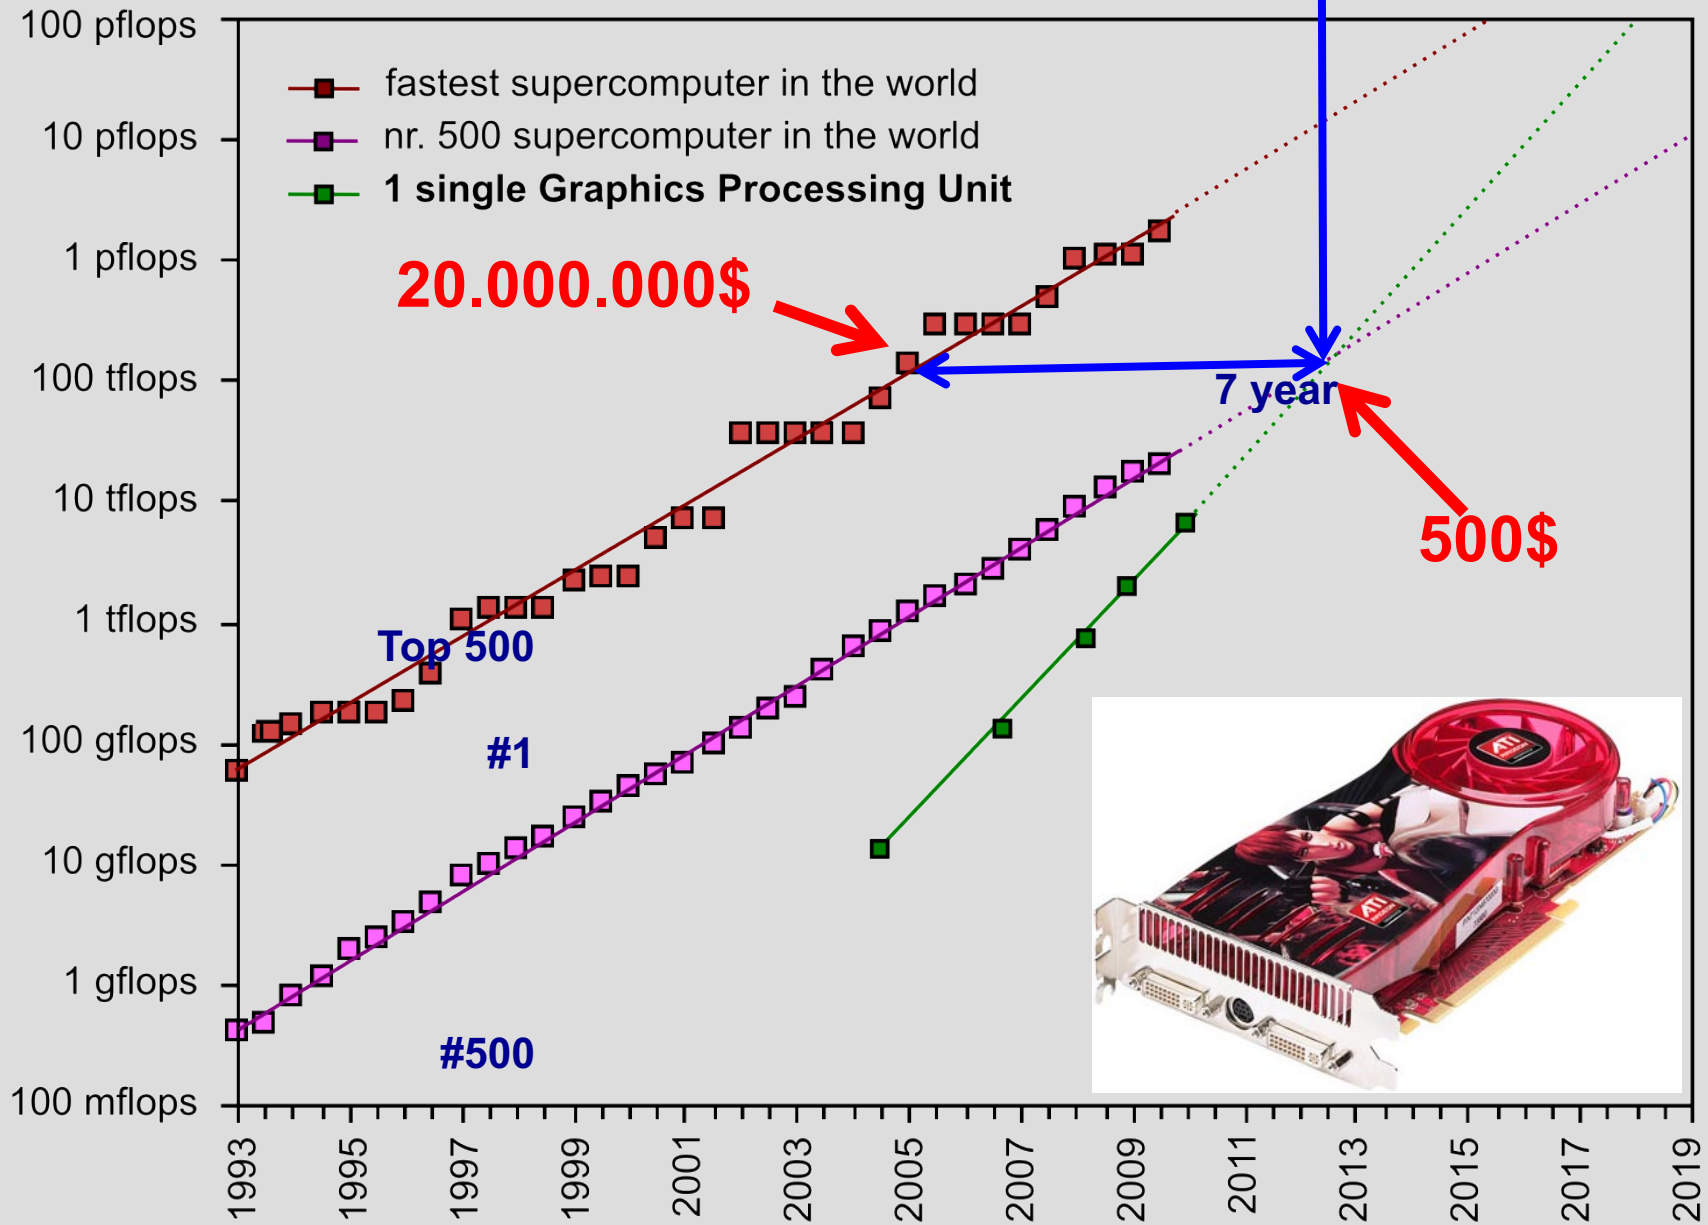




# Reliable and Safe!

This omnipresence of IT makes us not only strong but also vulnerable.


- A virus, a hacker, or a system failure can instantly send digital shockwaves around the world.

The hardware and software that allow all our systems to operate is becoming bigger and more complex all the time, and the capacity of networks and data storage is increasing by leaps and bounds.

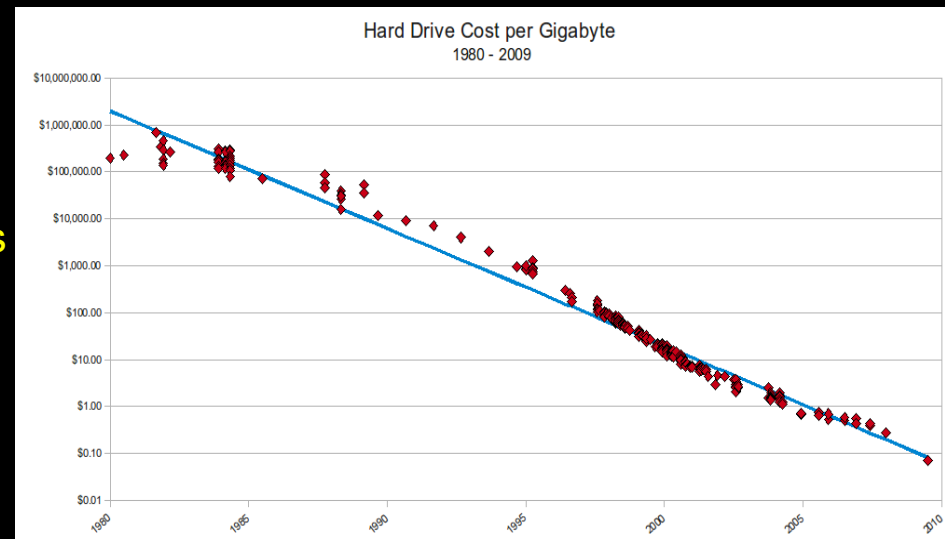

We will soon reach the limits of what is currently feasible and controllable.


## Performance Development

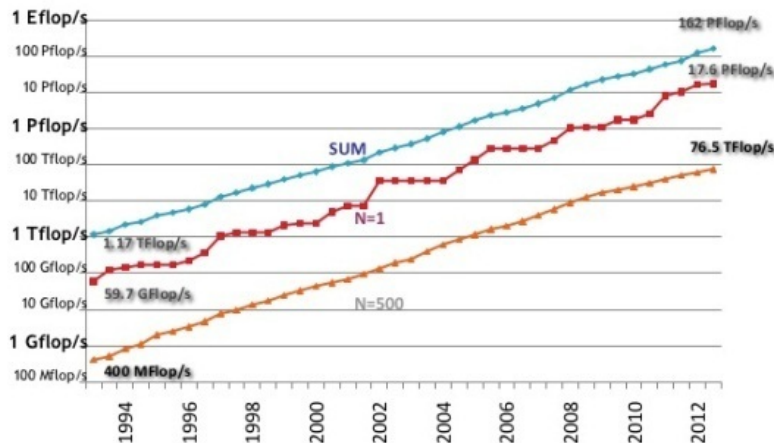



# Amsterdam is a major hub in The GLIF

F Dijkstra, J van der Ham, P Grosso, C de Laat, "A path finding implementation for multi-layer networks", Future Generation Computer Systems 25 (2), 142-146.

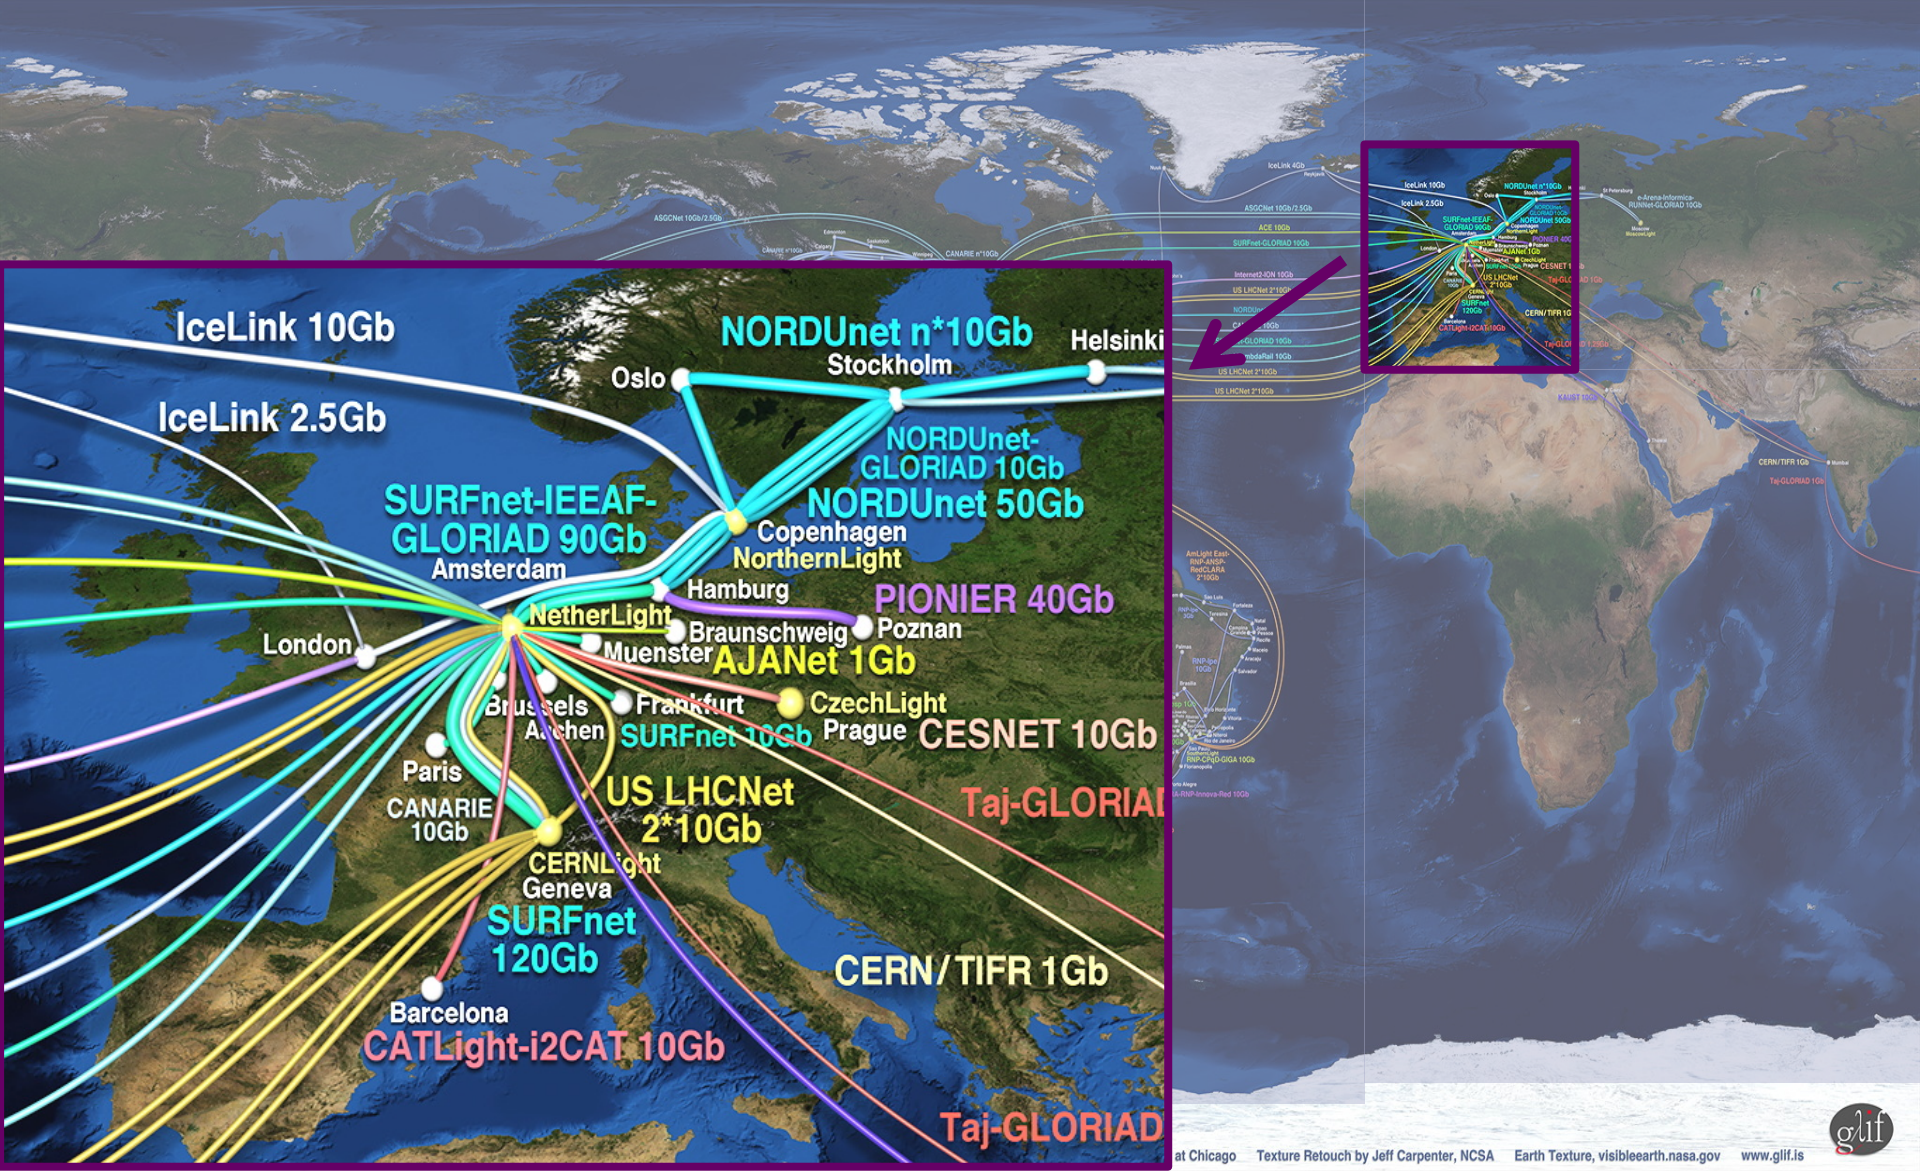

# ExoGeni @ OpenLab - UvA

Installed and up June 3th 2013



Connected via the new 100 Gb/s transatlantic To US-GENI

## TNC2013 DEMOS JUNE, 2013

DEMO	TITLE	OWNER	AFFILIATION	E-MAIL	A-SIDE	Z-SIDE	PORTS(S) MAN LAN	PORTS(S) TNC2013	DETAILS
1	Big data transfers with multipathing, OpenFlow and MPFCP	Ronald van der Pol	SURFnet	ronald.vanderpol@surfnet.nl	TNC/MECC, Maastricht NL	Chicago, IL	Existing 100G link between internet2 and ESnet	2x40GE (Juniper)- 2x10GE (OME6500)	In this demonstration we show how multipathing, OpenFlow and Multipath TCP (MPTCP) can help in large file transfers between data centres (Maastricht and Chicago). An OpenFlow application provisions multiple paths between the servers and MPFCP will be used on the servers to simultaneously send traffic across all these paths. This demo uses 2x40GE on the transatlantic 100G link. ESnet provides 2x40G between MAN LAN and StarLight, ACE and USLHCnet provide additional 10GEs.
2	Visualize 100G traffic	Inder Monga	ESnet	imonga@es.net					Using an SNMP feed from the Juniper switch at TNC2013 and/or Brocade AL25 node in MANLAN, this demo would visualize the total traffic on the link, of all demos aggregated. The network diagram will show the transatlantic topology and some of the demo topologies.
3	How many modern servers can fill a 100Gbps Transatlantic Circuit?	Inder Monga	ESnet	imonga@es.net	Chicago, Ill	TNC showfloor	1x 100GE	8x 10GE	In this demonstration, we show that with the proper tuning and tool, only 2 hosts on each continent can generate almost 80Gbps of traffic. Each server has 4 10G NICs connected to a 40G virtual circuit, and has iperf3 running to generate traffic. ESnet's new "iperf3" throughput measurement tool, still in beta, combines the best features from other tools such as iperf, netperf, and htopnet. See <a href="https://my.surfnet.nl/demos/tnc2013/">https://my.surfnet.nl/demos/tnc2013/</a>
4	First European ExoGeni at Work	Jeroen van der Ham	UvA	vdham@uva.nl	RENCI, NC	UvA, Amsterdam, NL	1x 10GE	1x 10GE	The ExoGENI racks at RENC1 and UvA will be interconnected over a 100 pipe and be on continuously, showing GENI connectivity between Amsterdam and the rest of the GENI nodes in the USA.
5	Up and down North Atlantic @ 100G	Michael Enrico	DANTE	michael.enrico@dante.net	TNC showfloor	TNC showfloor	1x 100GE	1x 100GE	The DANTE 100GE test set will be placed at the TNC2013 showfloor and connected to the Juniper at 100G. When this demo is running a loop @ MAN LAN's Brocade switch will ensure that the traffic sent to MAN LAN returns to the showfloor. On display is the throughput and RTT (to show the traffic travelled the Atlantic twice)



# Alien light From idea to realisation!

## 40Gb/s alien wavelength transmission via a multi-vendor 10Gb/s DWDM infrastructure



### Alien wavelength advantages

- Direct connection of customer equipment<sup>[1]</sup> → cost savings
- Avoid OEO regeneration → power savings
- Faster time to service<sup>[2]</sup> → time savings
- Support of different modulation formats<sup>[3]</sup> → extend network lifetime


### Alien wavelength challenges

- Complex end-to-end optical path engineering in terms of linear (i.e. OSNR, dispersion) and non-linear (FWM, SPM, XPM, Raman) transmission effects for different modulation formats.
- Complex interoperability testing.
- End-to-end monitoring, fault isolation and resolution.
- End-to-end service activation.

In this demonstration we will investigate the performance of a 40Gb/s PM-QPSK alien wavelength installed on a 10Gb/s DWDM infrastructure.


### New method to present fiber link quality, FoM (Figure of Merit)

In order to quantify optical link grade, we propose a new method of representing system quality: the FOM (Figure of Merit) for concatenated fiber spans.

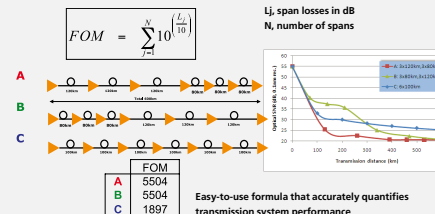


### Transmission system setup

JOINT SURFnet/NORDUnet 40Gb/s PM-QPSK alien wavelength DEMONSTRATION.

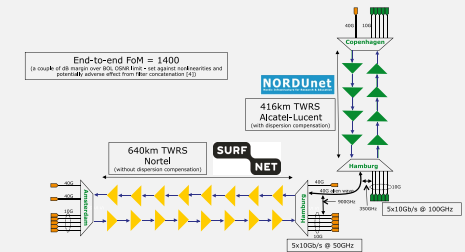

### Test results

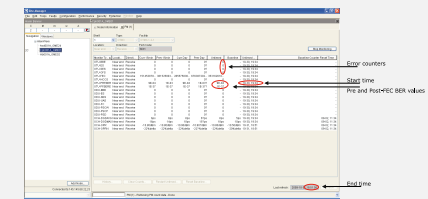

Error-free transmission for 23 hours, 17 minutes → BER < 3,0 · 10<sup>-16</sup>

### Conclusions


- We have investigated experimentally the all-optical transmission of a 40Gb/s PM-QPSK alien wavelength via a concatenated native and third party DWDM system that both were carrying live 10Gb/s wavelengths.
- The end-to-end transmission system consisted of 1056 km of TWRS (TrueWave Reduced Slope) transmission fiber.
- We demonstrated error-free transmission (i.e. BER below 10<sup>-15</sup>) during a 23 hour period.
- More detailed system performance analysis will be presented in an upcoming paper.



REFERENCES  
ACKNOWLEDGEMENTS

[1] "OPERATIONAL SOLUTIONS FOR AN OPEN DWDM LAYER", O. GERSTEL ET AL. OFC2009 | [2] "AT&T OPTICAL TRANSPORT SERVICES", BARBARA E. SMITH, OFC'09  
[3] "OPEX SAVINGS OF ALL-OPTICAL CORE NETWORKS", ANDREW LORD AND CARL ENGINEER, ECCO2009 | [4] NORTEL/SURFNET INTERNAL COMMUNICATION  
WE ARE GRATEFUL TO NORDUNET FOR PROVIDING US WITH BANDWIDTH ON THEIR DWDM LINK FOR THIS EXPERIMENT AND ALSO FOR THEIR SUPPORT AND ASSISTANCE DURING THE EXPERIMENTS. WE ALSO ACKNOWLEDGE TELINDUS AND NORTEL FOR THEIR INTEGRATION WORK AND SIMULATION SUPPORT

# Alien light From idea to realisation!

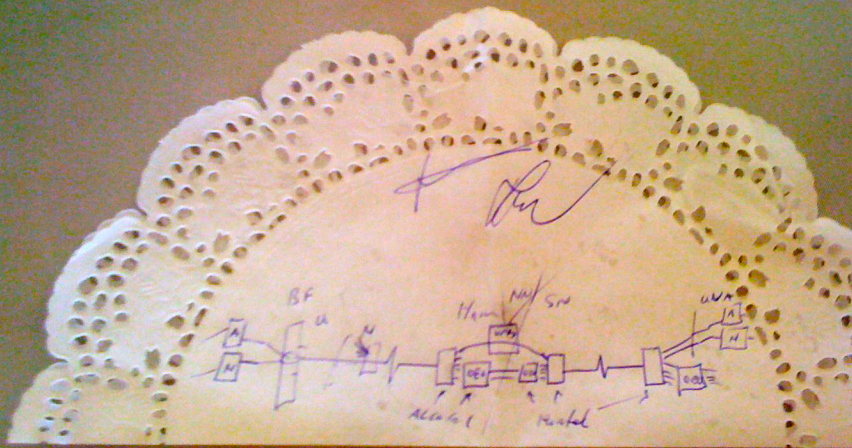

## 40Gb/s alien wavelength transmission via a multi-vendor 10Gb/s DWDM infrastructure



### Alien wavelength advantages

- Direct connection of customer equipment<sup>[1]</sup> → cost savings
- Avoid OEO regeneration → power savings
- Faster time to service<sup>[2]</sup> → time savings
- Support of different modulation formats<sup>[3]</sup> → extend network lifetime


### Alien wavelength challenges

- Complex end-to-end optical path engineering in terms of linear (i.e. OSNR, dispersion) and non-linear (FWM, SPM, XPM, Raman) transmission effects for different modulation formats.
- Complex interoperability testing.
- End-to-end monitoring, fault isolation and resolution.
- End-to-end service activation.

In this demonstration we will investigate the performance of a 40Gb/s PM-QPSK alien wavelength installed on a 10Gb/s DWDM infrastructure.


### New method to present fiber link quality, FoM (Figure of Merit)

In order to quantify optical link grade, we propose a new method of representing system quality: the FOM (Figure of Merit) for concatenated fiber spans.

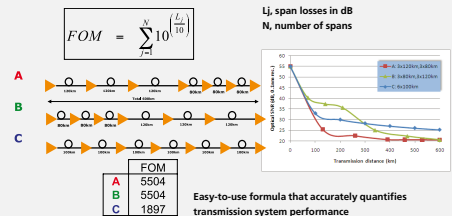


### Transmission system setup

JOINT SURFnet/NORDUnet 40Gb/s PM-QPSK alien wavelength DEMONSTRATION.

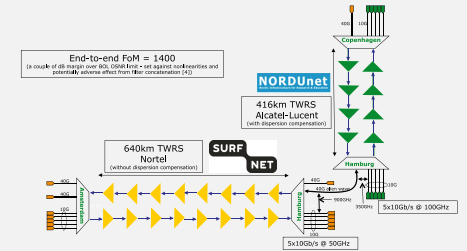

### Test results

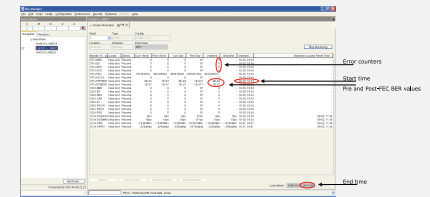

Error-free transmission for 23 hours, 17 minutes → BER < 3.0 10<sup>-16</sup>

### Conclusions

- We have investigated experimentally the all-optical transmission of a 40Gb/s PM-QPSK alien wavelength via a concatenated native and third party DWDM system that both were carrying live 10Gb/s wavelengths.
- The end-to-end transmission system consisted of 1056 km of TWRS (TrueWave Reduced Slope) transmission fiber.
- We demonstrated error-free transmission (i.e. BER below 10<sup>-15</sup>) during a 23 hour period.
- More detailed system performance analysis will be presented in an upcoming paper.



REFERENCES  
ACKNOWLEDGEMENTS

[1] "OPERATIONAL SOLUTIONS FOR AN OPEN DWDM LAYER", O. GERSTEL ET AL. OFC2009 | [2] "AT&T OPTICAL TRANSPORT SERVICES", BARBARA E. SMITH, OFC'09  
[3] "OPEX SAVINGS OF ALL-OPTICAL CORE NETWORKS", ANDREW LORD AND CARL ENGINEER, ECCO2009 | [4] NORTEL/SURFNET INTERNAL COMMUNICATION  
WE ARE GRATEFUL TO NORDUNET FOR PROVIDING US WITH BANDWIDTH ON THEIR DWDM LINK FOR THIS EXPERIMENT AND ALSO FOR THEIR SUPPORT AND ASSISTANCE DURING THE EXPERIMENTS. WE ALSO ACKNOWLEDGE TELINDUS AND NORTEL FOR THEIR INTEGRATION WORK AND SIMULATION SUPPORT


# ClearStream @ TNC2011

Setup  
codename:  
FlightCees



## UvA

iPerf 17 3.2 GHz Q-core  
iPerf Amd Ph II 3.6 GHz HexC




Mellanox

40G E




## Copenhagen

iPerf 2\* dual 2.8 GHz Q-core  
iPerf



Mellanox



## CERN

CIENA DWDM

17 ms RTT

## Hamburg

Alcatel DWDM


27 ms RTT

Amsterdam – Geneva (CERN) – Copenhagen – 4400 km (2700 km alien light)

# Visit CIENA Booth

surf to <http://tnc.delaat.net/tnc11>


Amsterdam (UvA) Live RX Traffic

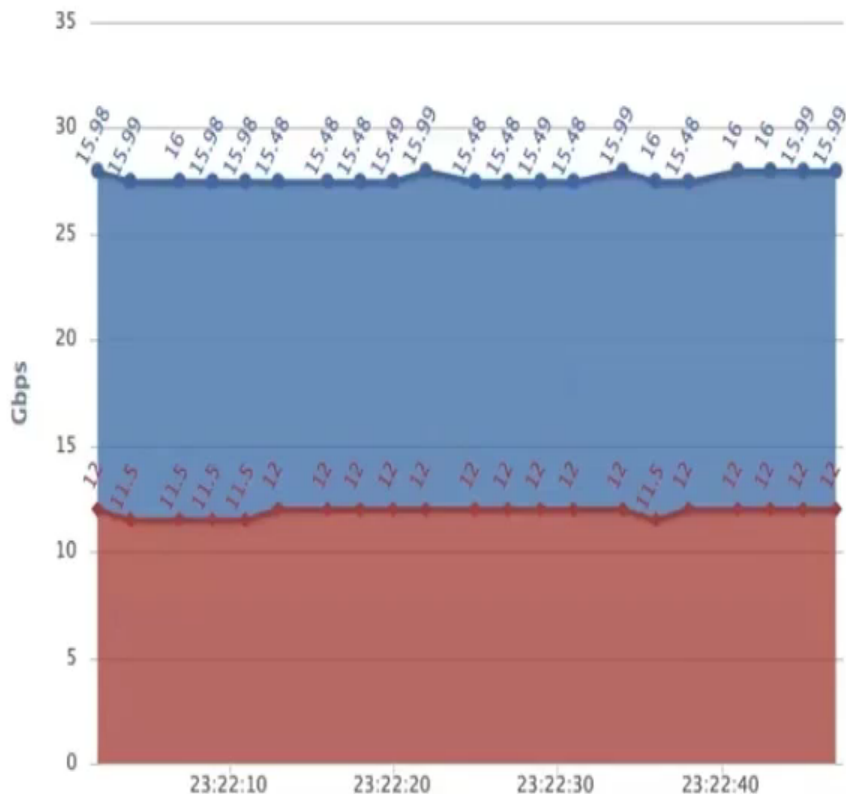

eth0 RX on tn-uva-l eth0 RX on tn-uva-r

Highcharts.com

Copenhagen POP RX Traffic

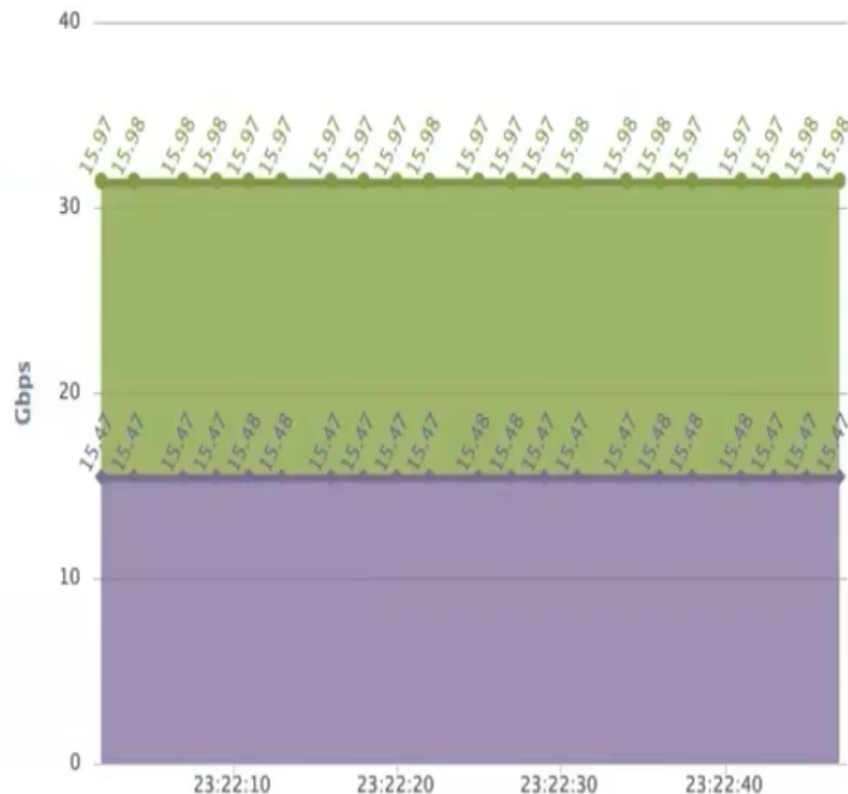

eth0 RX on tn-cpg-l eth0 RX on tn-cpg-r


Highcharts.com

27.99 Gbps to Amsterdam <-> 31.45 Gbps to Copenhagen

Total Throughput 59.44 Gbps RTT 44.010 ms




# Server Architecture

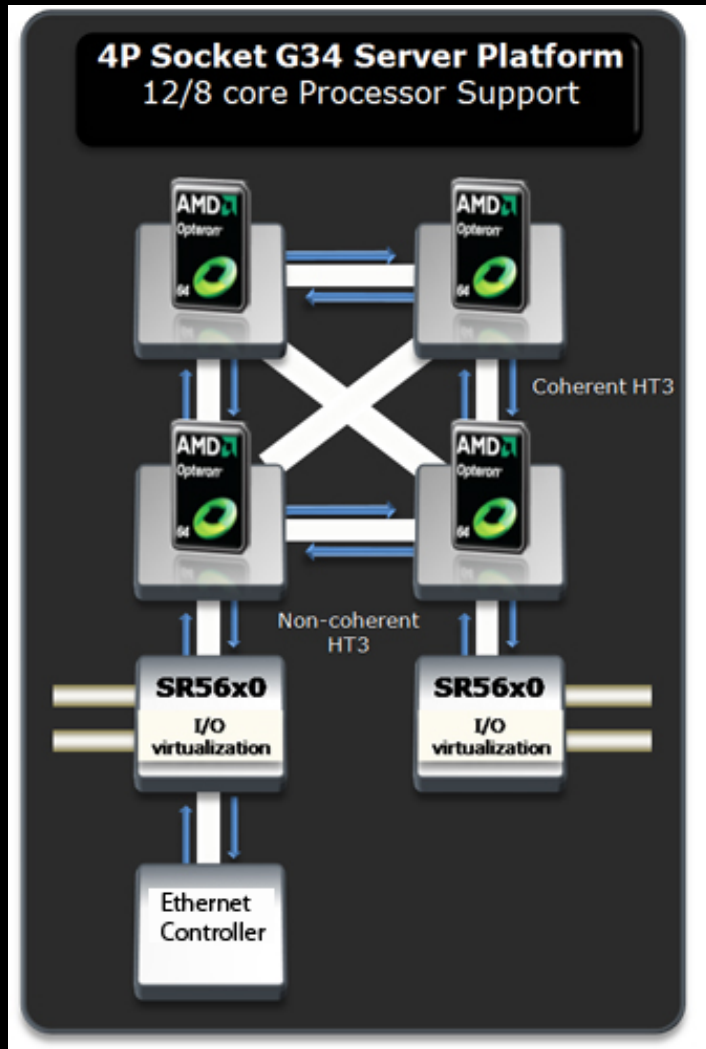

DELL R815


4 x AMD Opteron 6100

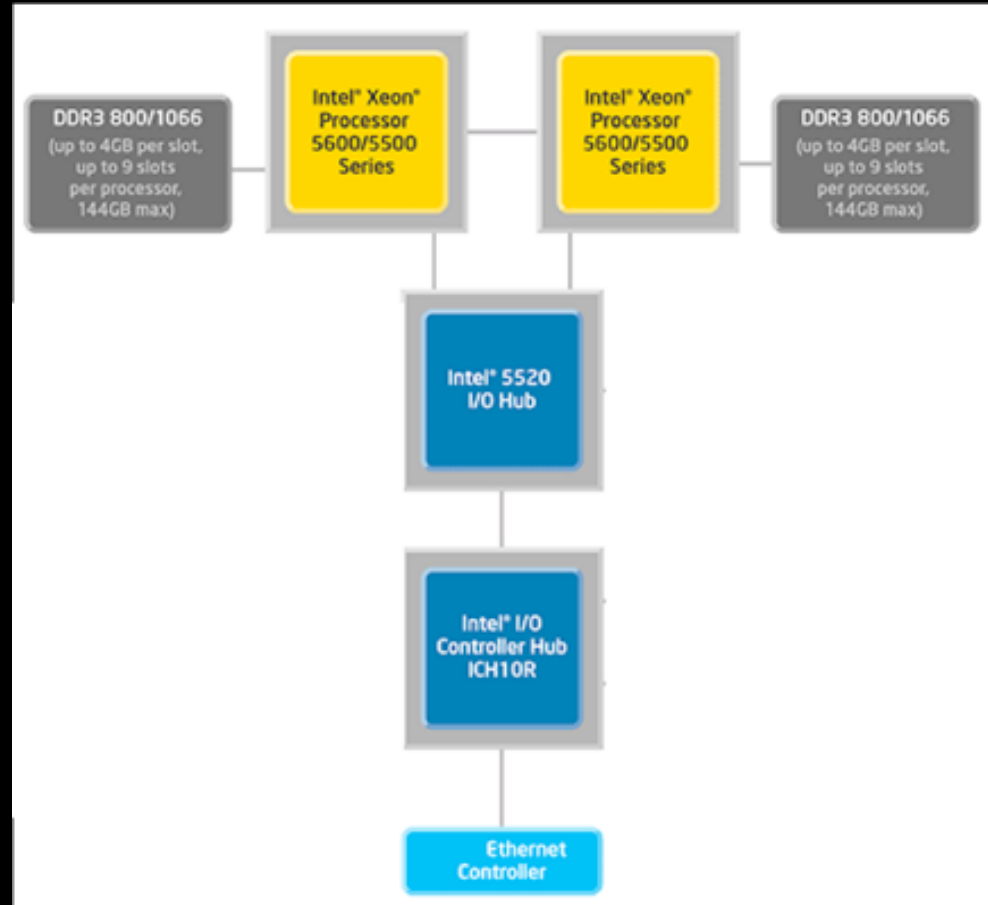

Supermicro X8DTT-HIBQF

2 x Intel Xeon

# CPU Topology benchmark

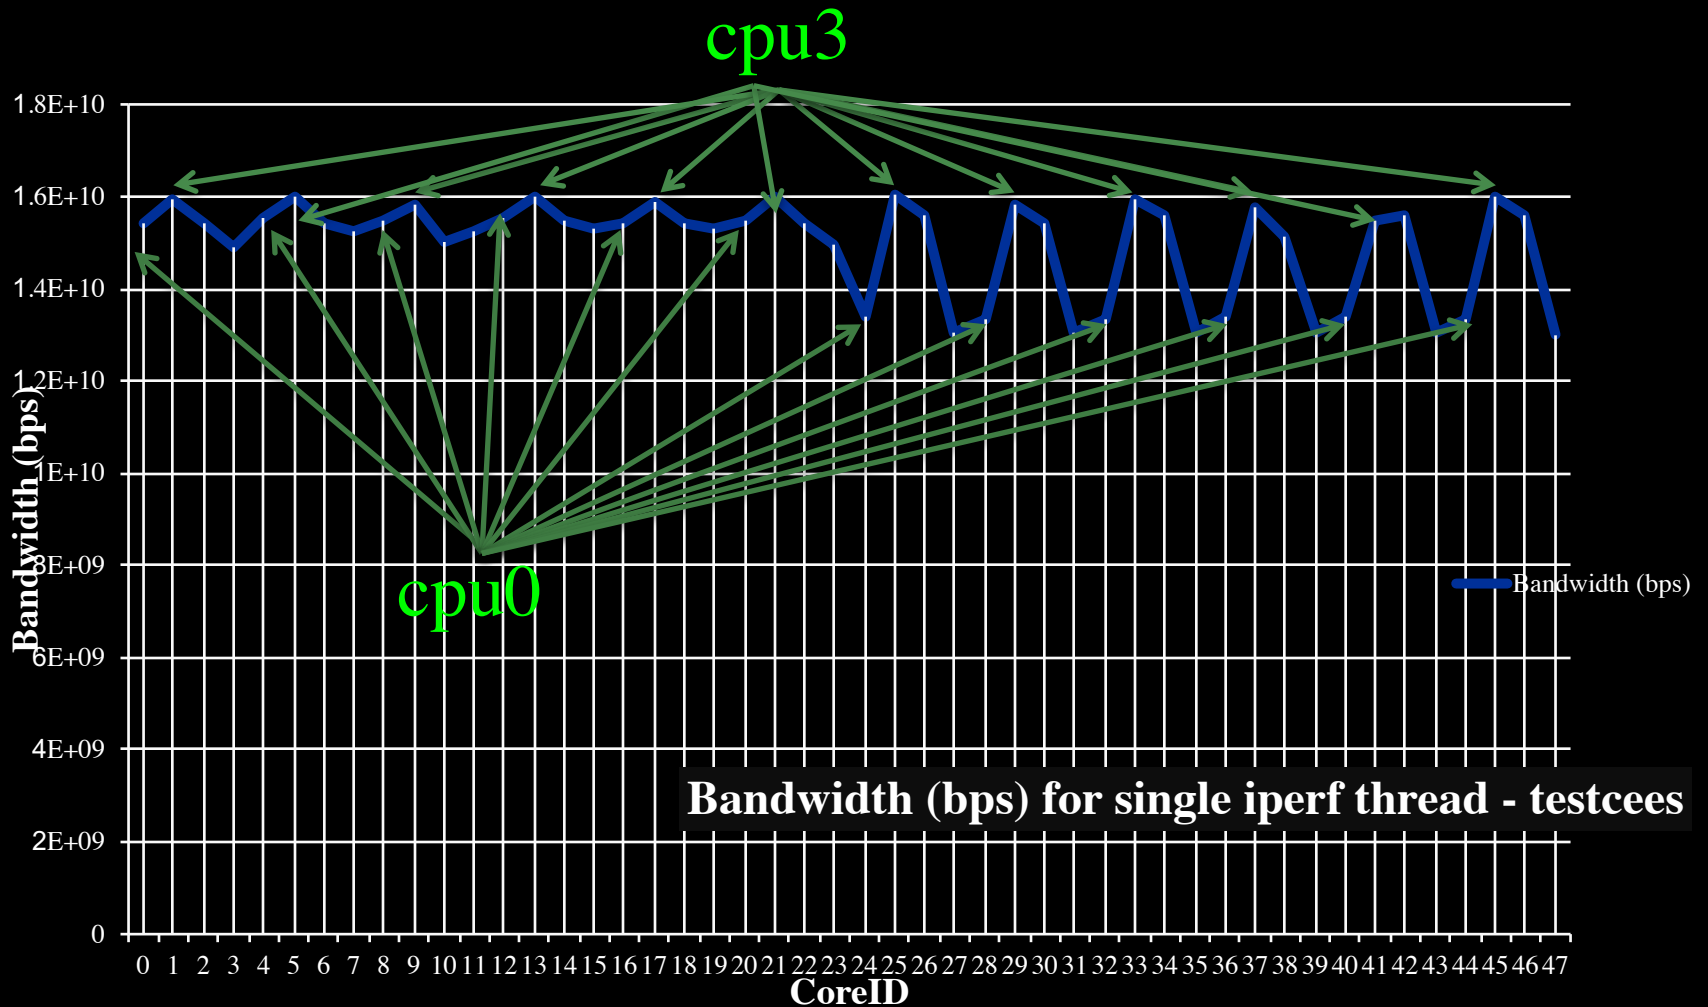

We used numactl to bind iperf to cores

# Mission

*Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?*

- *Capacity*
  - *Bandwidth on demand, QoS, architectures, photonics, performance*
- ***Capability***
  - ***Programmability, virtualization, complexity, semantics, workflows***
- *Security*
  - *Anonymity, integrity of data in distributed data processing*
- *Sustainability*
  - *Greening infrastructure, awareness*
- *Resilience*
  - *Systems under attack, failures, disasters*








# LinkedIn for Infrastructure




- From semantic Web / Resource Description Framework.
- The RDF uses XML as an interchange syntax.
- Data is described by triplets (Friend of a Friend):

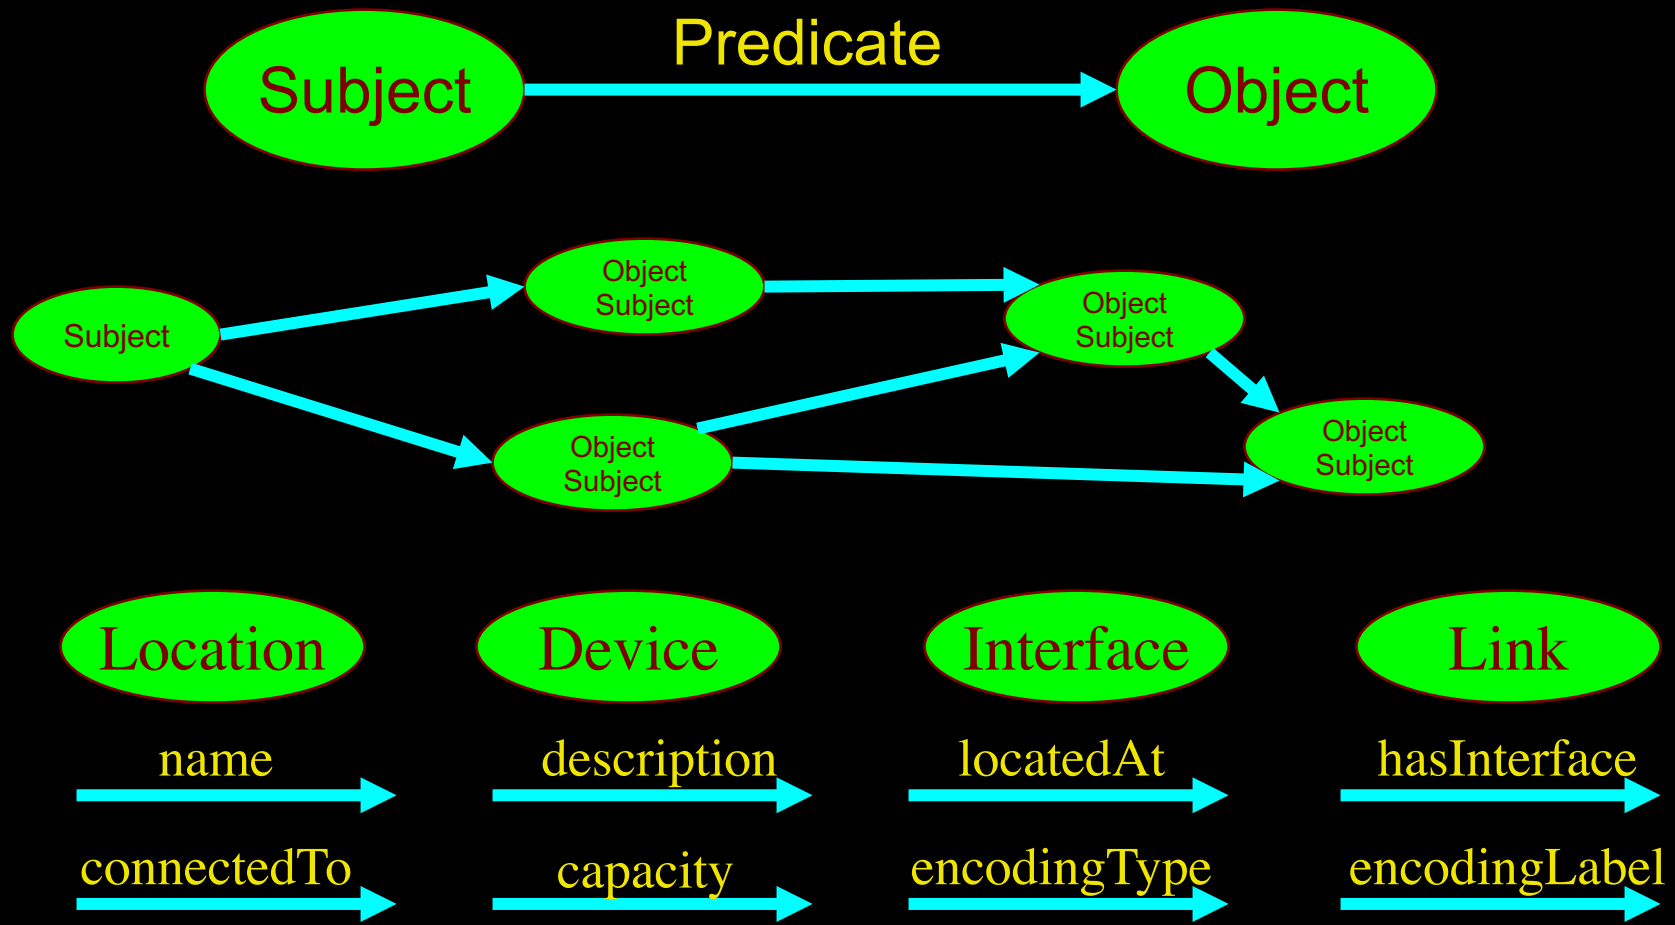

# Network Description Language


Article: F. Dijkstra, B. Andree, K. Koymans, J. van der Ham, P. Grosso, C. de Laat, "A Multi-Layer Network Model Based on ITU-T G.805"

Choice of RDF instead of XML syntax  
Grounded modeling based on G805 description:

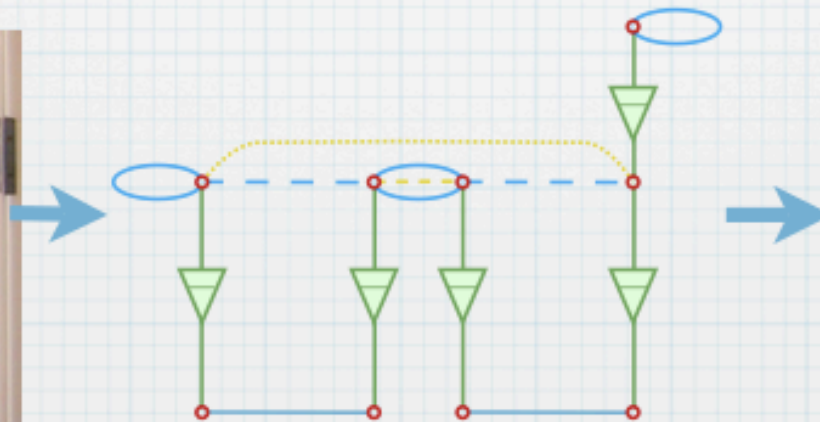


```
<ndl:Device rdf:about="#Force10">
  <ndl:hasInterface rdf:resource=
    "#Force10:te6/0"/>
</ndl:Device>
<ndl:Interface rdf:about="#Force10:te6/0">
  <rdfs:label>te6/0</rdfs:label>
  <ndl:capacity>1.25E6</ndl:capacity>
  <ndlconf:multiplex>
    <ndicap:adaptation rdf:resource=
      "#Tagged-Ethernet-In-Ethernet"/>
    <ndlconf:serverPropertyValue
      rdf:resource="#MTU-1500byte"/>
  </ndlconf:multiplex>
  <ndlconf:hasChannel>
    <ndlconf:Channel rdf:about=
      "#Force10:te6/0:vlan4">
      <ndleth:hasVlan>4</ndleth:hasVlan>
      <ndlconf:switchedTo rdf:resource=
        "#Force10:gi5/1:vlan7"/>
    </ndlconf:Channel>
  </ndlconf:hasChannel>
</ndl:Interface>
```

# Multi-layer descriptions in NDL

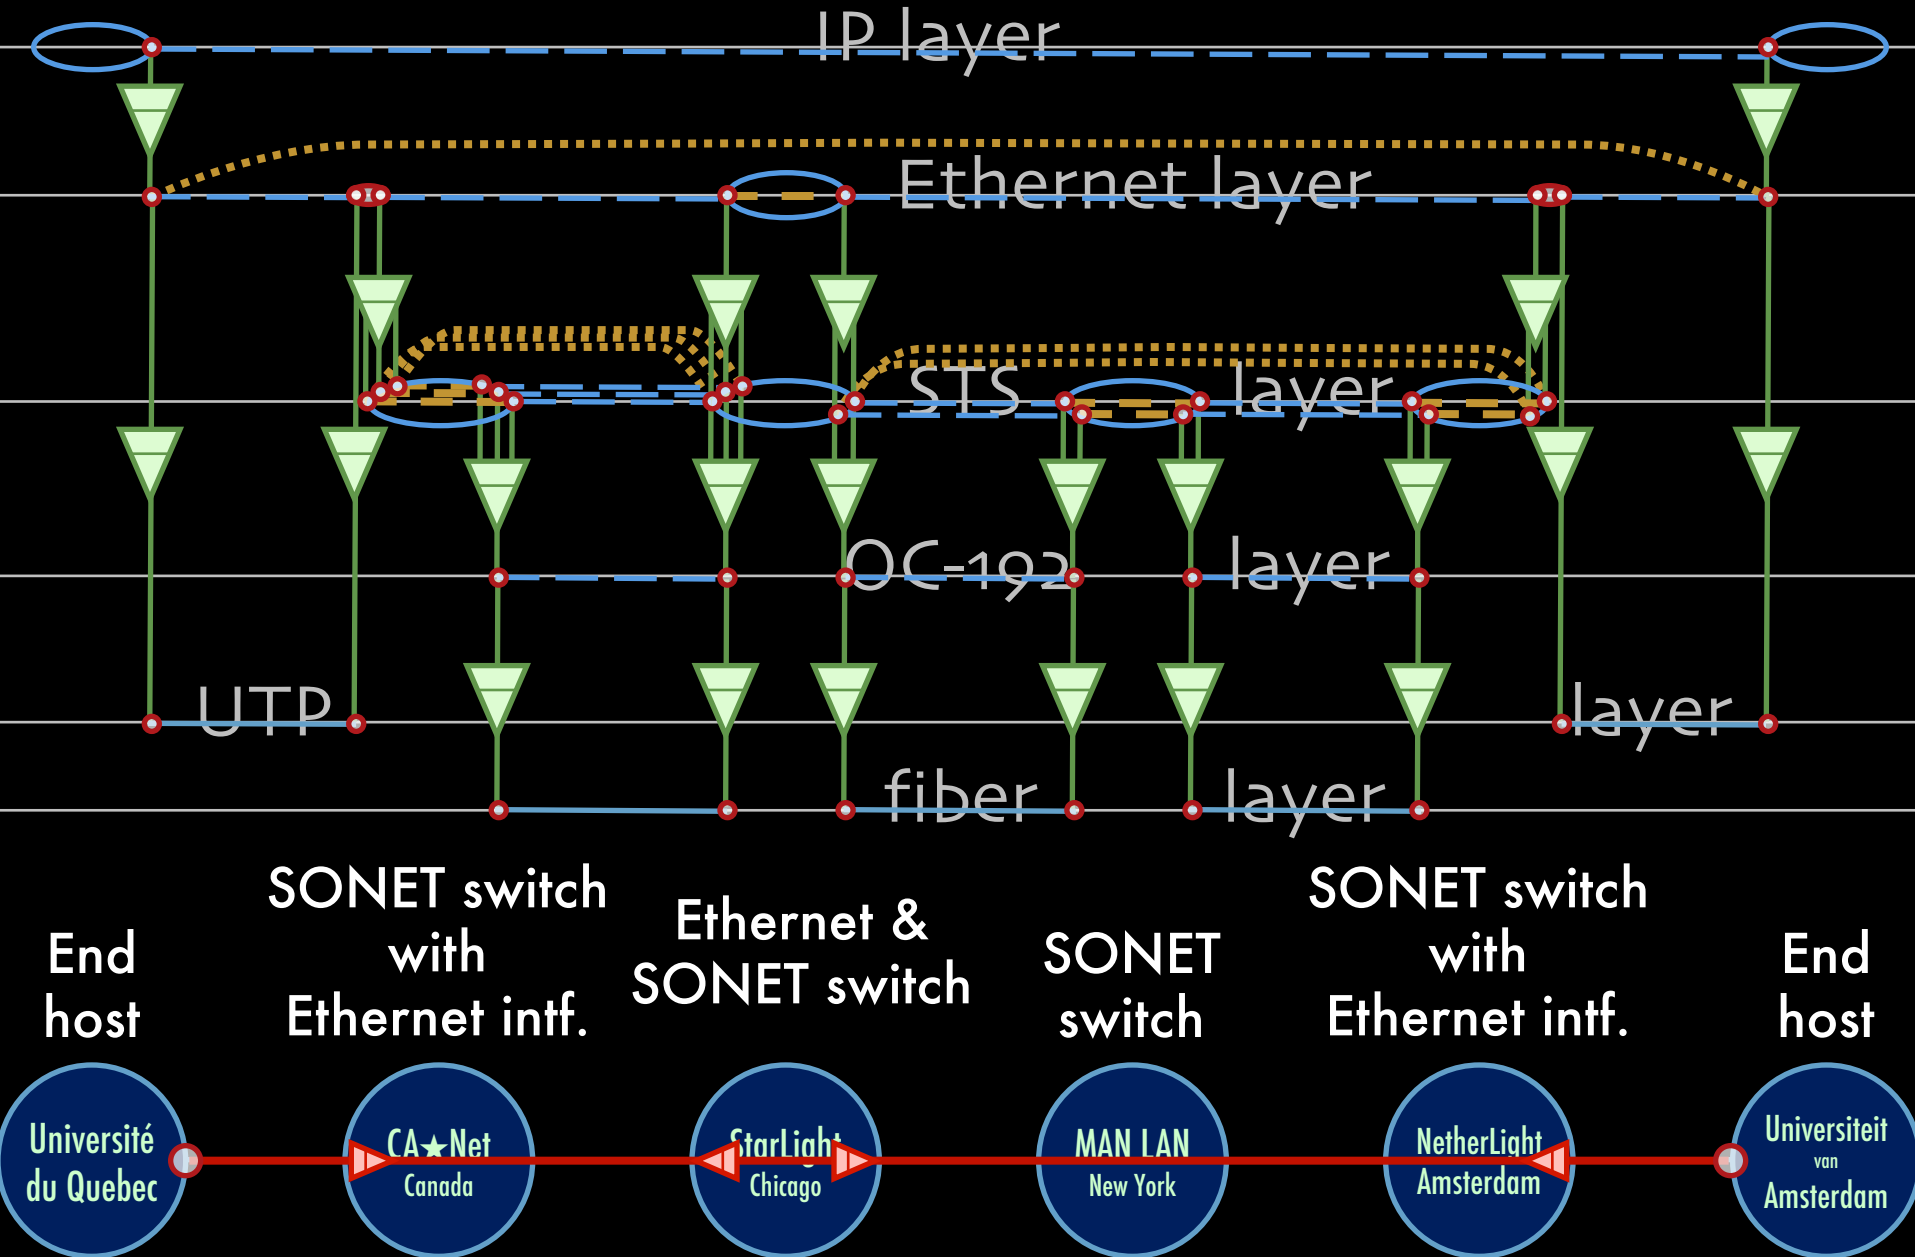




# NML OGF spec iNDL

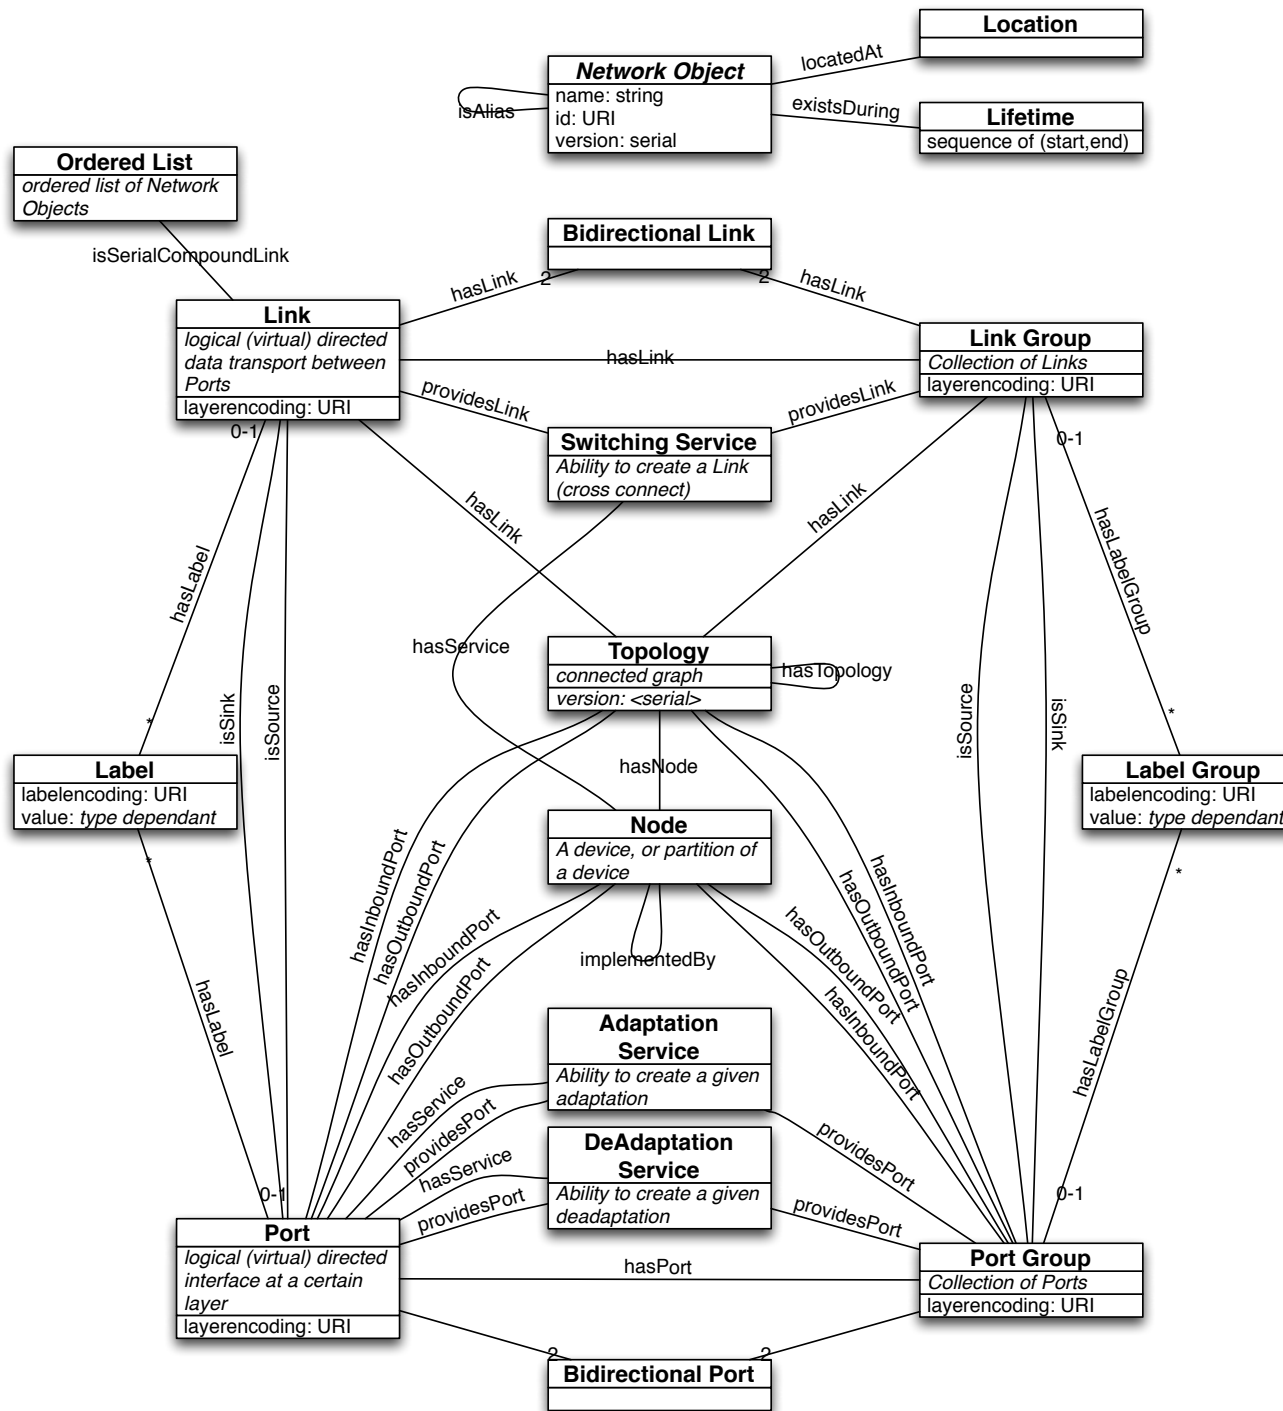


# Network Topology Description

Network topology research supporting automatic network provisioning

- Inter-domain networks
- Multiple technologies
- Based on incomplete information
- Possibly linked to other resources

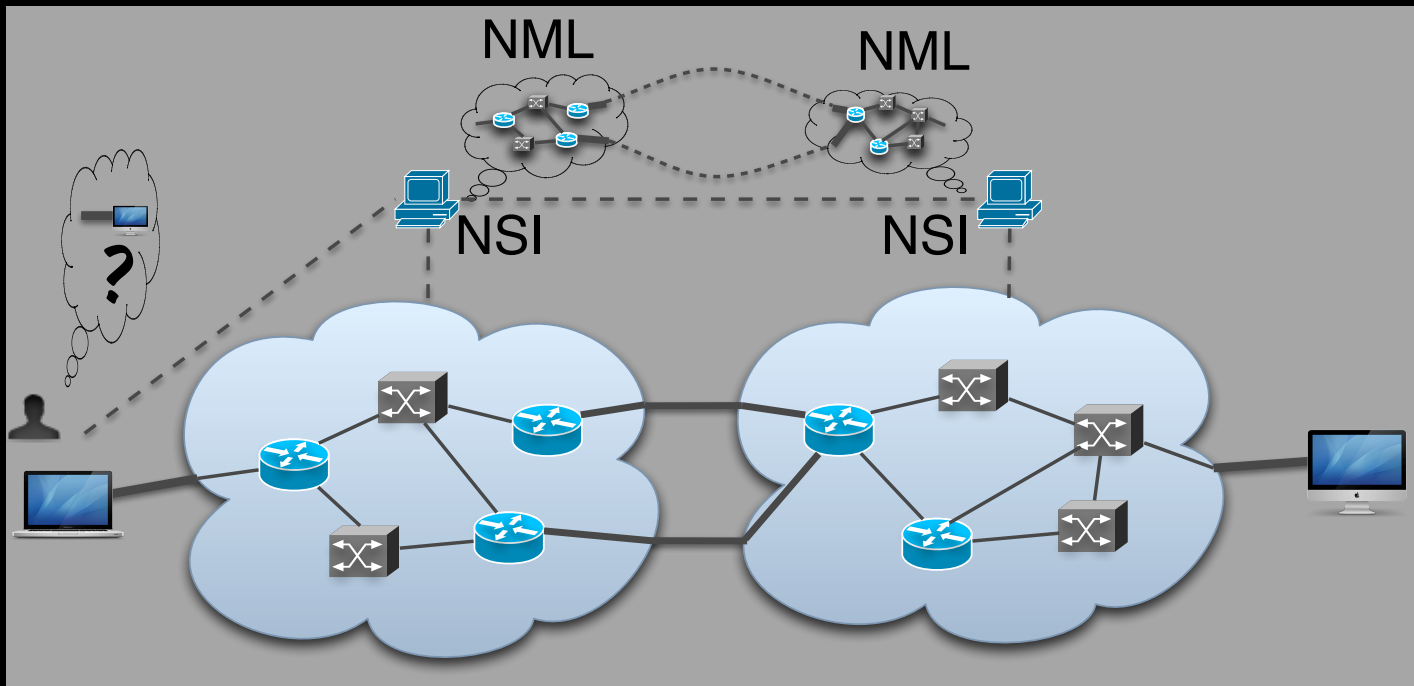

# GLIF 2013 in NML

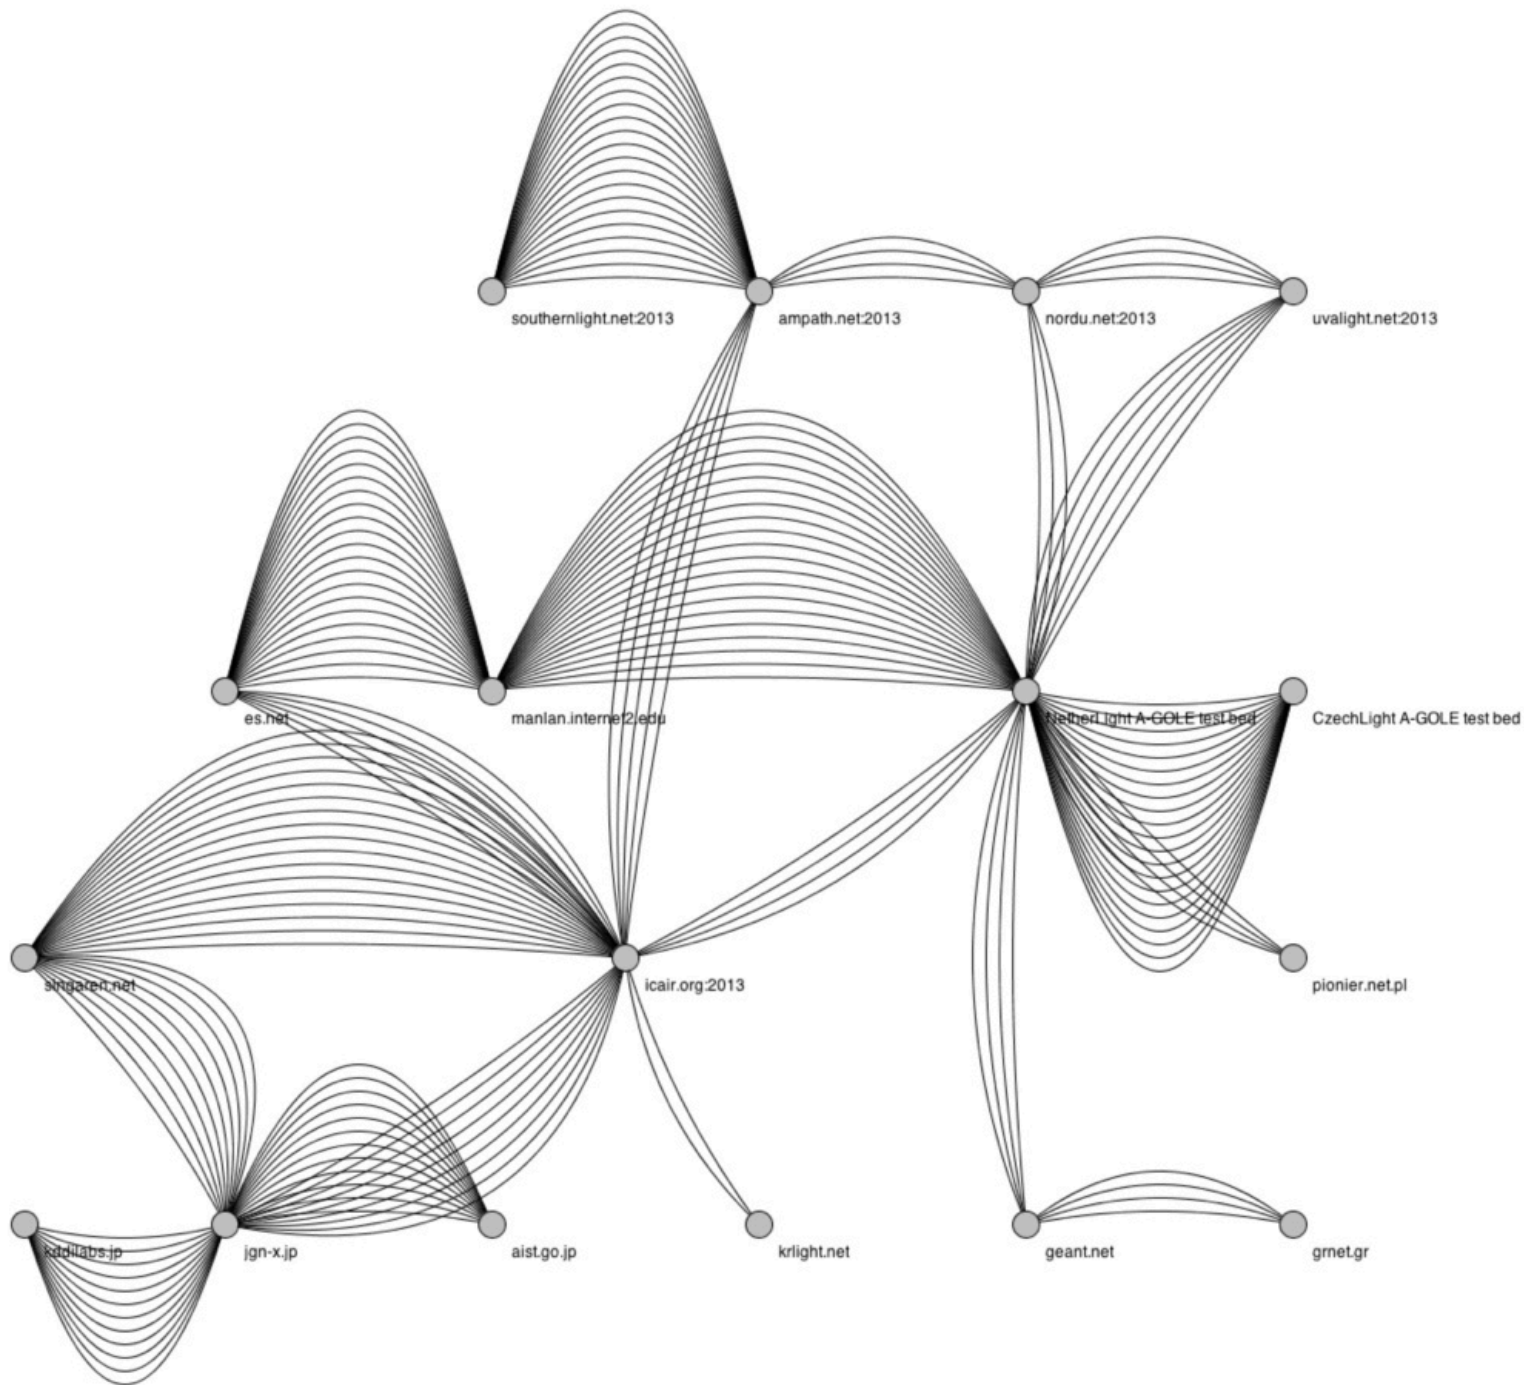

# CdL


# CineGrid Description Language

CineGrid is an initiative to facilitate the exchange, storage and display of high-quality digital media.

The CineGrid Description Language (CDL) describes CineGrid resources. Streaming, display and storage components are organized in a hierarchical way.

CDL has bindings to the NDL ontology that enables descriptions of network components and their interconnections.

With CDL we can reason on the CineGrid infrastructure and its services.

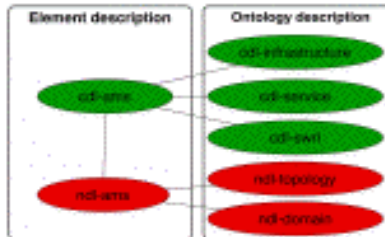

SQWRL is used to query the Ontology.


Which CineGrid nodes are directly connected?



```
cdl:hasElements(?node1, ?host1) ^
ndl-topo:hasInterface(?host1, ?iF1) ^ ndl-
topo:connectedTo(?iF1, ?iF2) ^
ndl-topo:hasInterface(?host2, ?iF2) ^
cdl:hasElements(?node2, ?host2) ->
sparql:select(?node1, ?node2)
```

cdl-ams.owl

cdl-ams:Amsterdam cdl-ams:Prague  
cdl-ams:Prague cdl-ams:Amsterdam

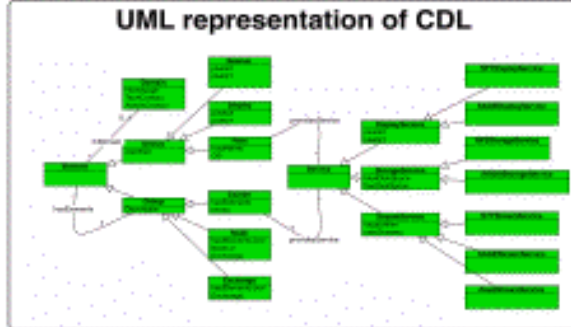


CDL links to NDL using the **owl:SameAs** property. CDL defines the services, NDL the network interfaces and links. The combination of the two ontologies identifies the host pairs that support matching services via existing network connections.



# Information Modeling

Define a common information model for *infrastructures* and *services*.  
Base it on Semantic Web.

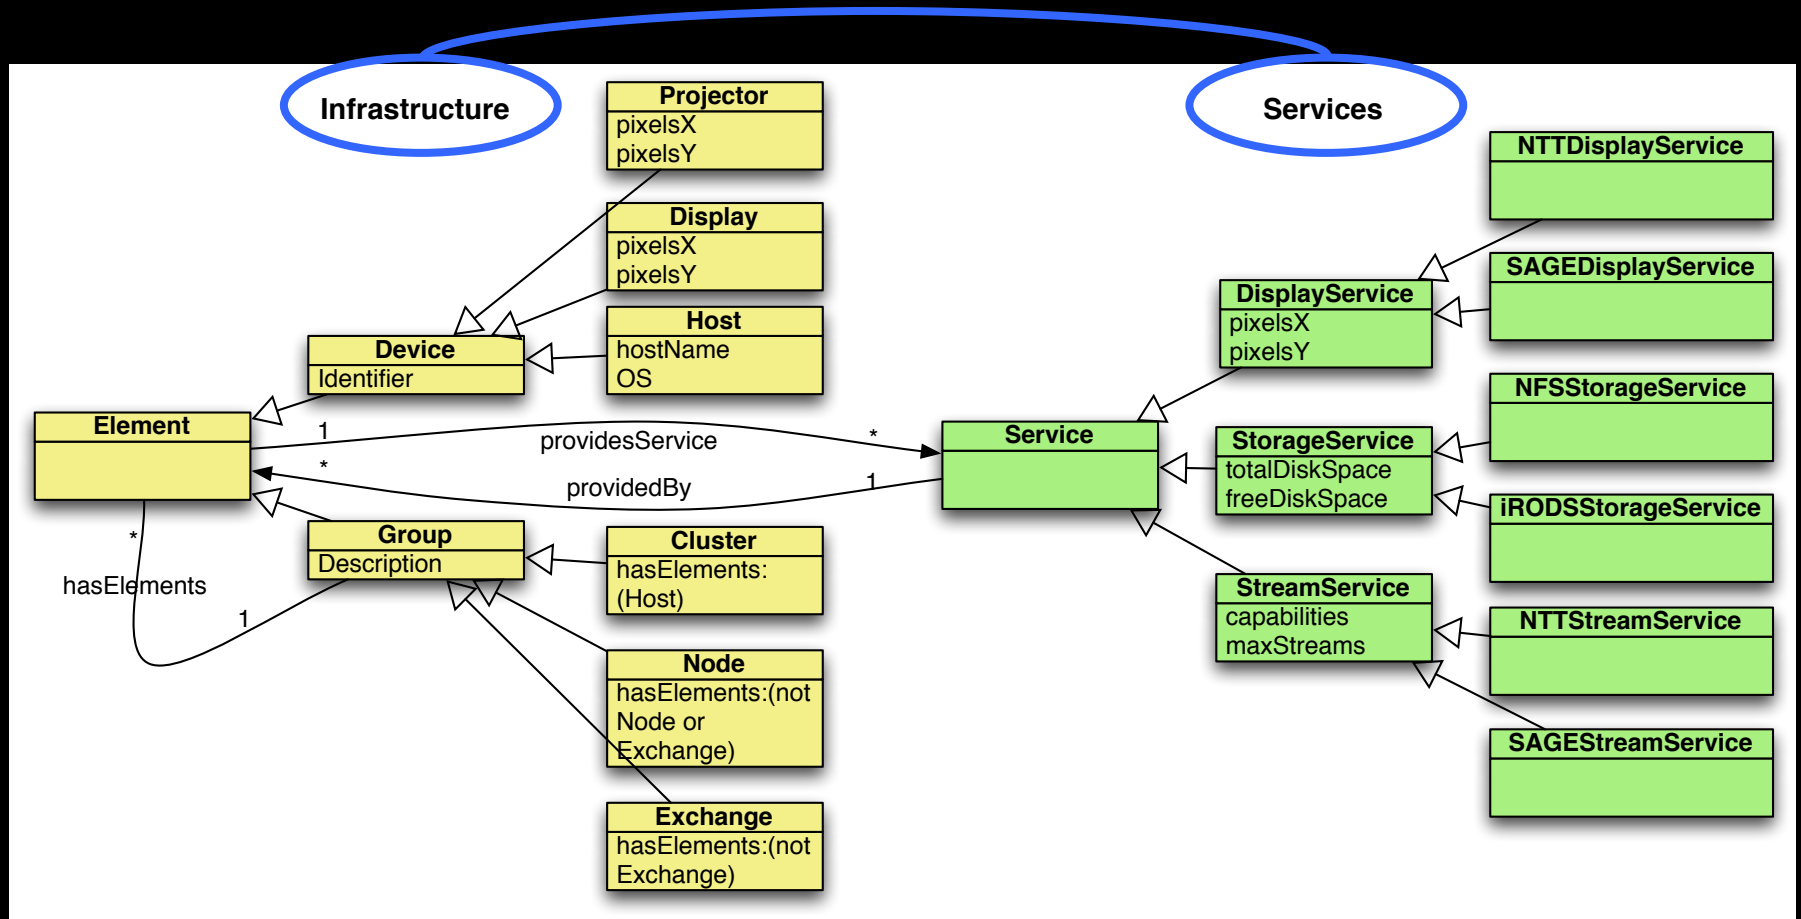

# SNE - Mission

*Can we create smart and safe data processing systems that can be tailored to diverse application needs?*

- *Capacity*
  - *Bandwidth on demand, QoS, architectures, photonics, performance*
- ***Capability***
  - ***Programmability, virtualization, complexity, semantics, workflows***
- ***Security***
  - ***Policy, Trust, Anonymity, Privacy, Integrity***
- *Sustainability*
  - *Greening infrastructure, Awareness*
- ***Resilience***
  - ***Failures, Disasters, Systems under attack***



# SARNET: Security Autonomous Response with programmable NETWORKS

Cees de Laat

Leon Gommans, Rodney Wilson, Rob Meijer

Tom van Engers, Marc Lyonais, Paola Grosso, Frans Franken,  
Amenah Deljoo, Ralph Koning, Ben de Graaff, Stojan Trajanovski



UNIVERSITY OF AMSTERDAM




AIRFRANCE KLM



# Cyber security program

Research goal is to obtain the knowledge to create ICT systems that:

- model their state (situation)
- discover by observations and reasoning if and how an attack is developing and calculate the associated risks
- have the knowledge to calculate the effect of counter measures on states and their risks
- choose and execute one.

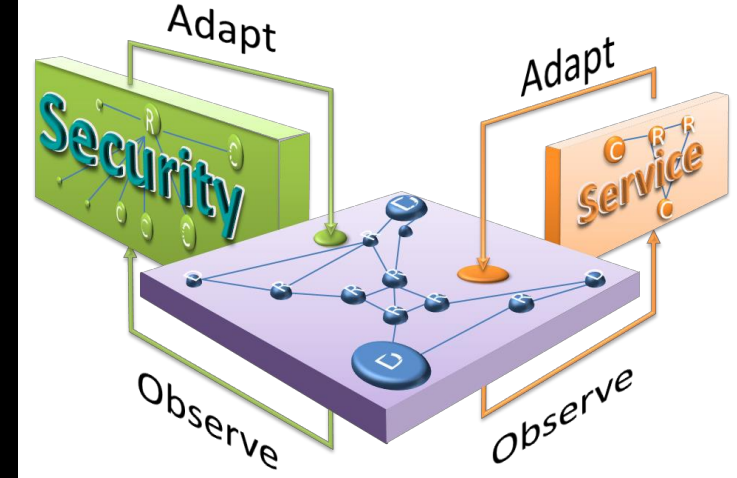


In short, we research the concept of networked computer infrastructures exhibiting SAR: Security Autonomous Response.





# Context & Goal

## Security Autonomous Response NETWORK Research

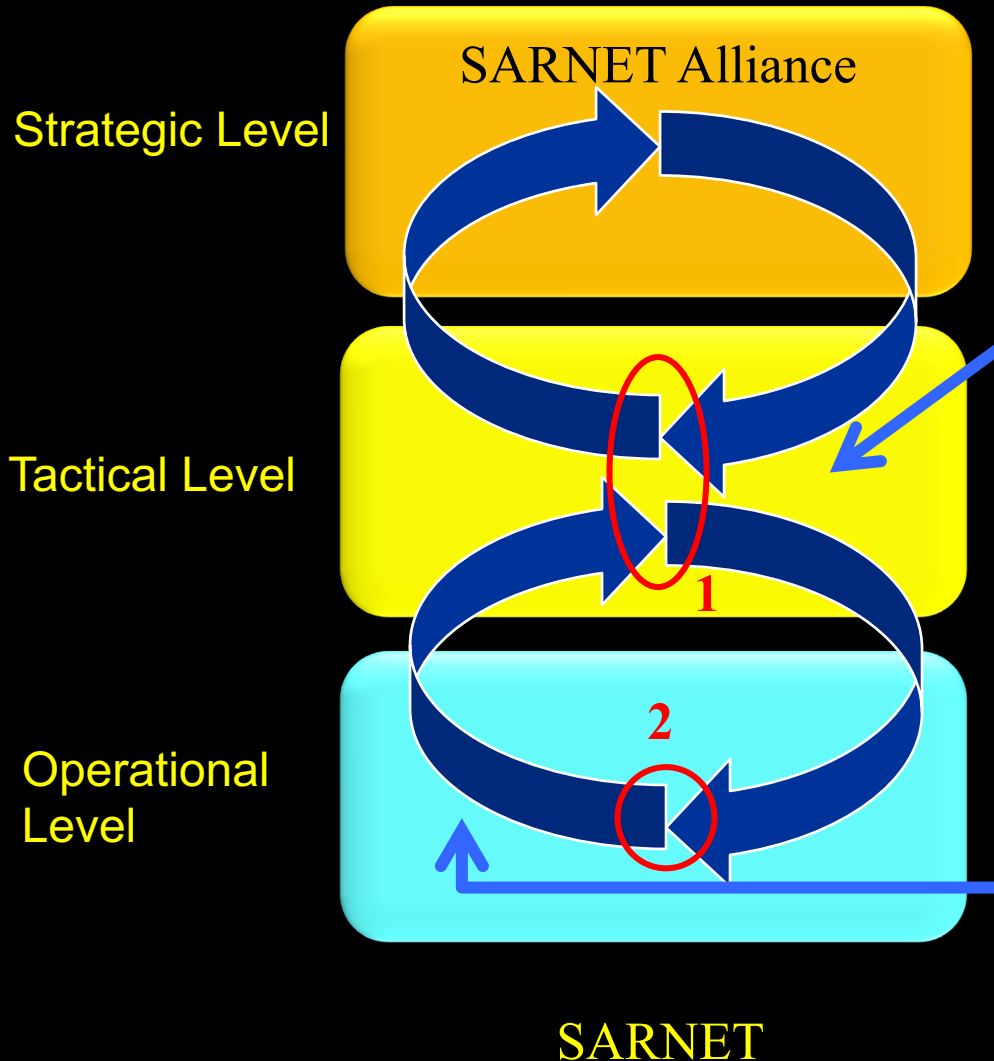


**Ameneh Deljoo (PhD):**  
Why create SARNET Alliances?  
Model autonomous SARNET behaviors to identify risk and benefits for SARNET stakeholders

**Stojan Trajanovski (PD):**  
Determine best defense scenario against cyberattacks deploying SARNET functions (1) based on security state and KPI information (2).

**Ralph Koning (PhD)**  
**Ben de Graaff (SP):**  
1. Design functionalities needed to operate a SARNET using SDN/NFV  
2. deliver security state and KPI information (e.g cost)


# Ciena's CENI topology

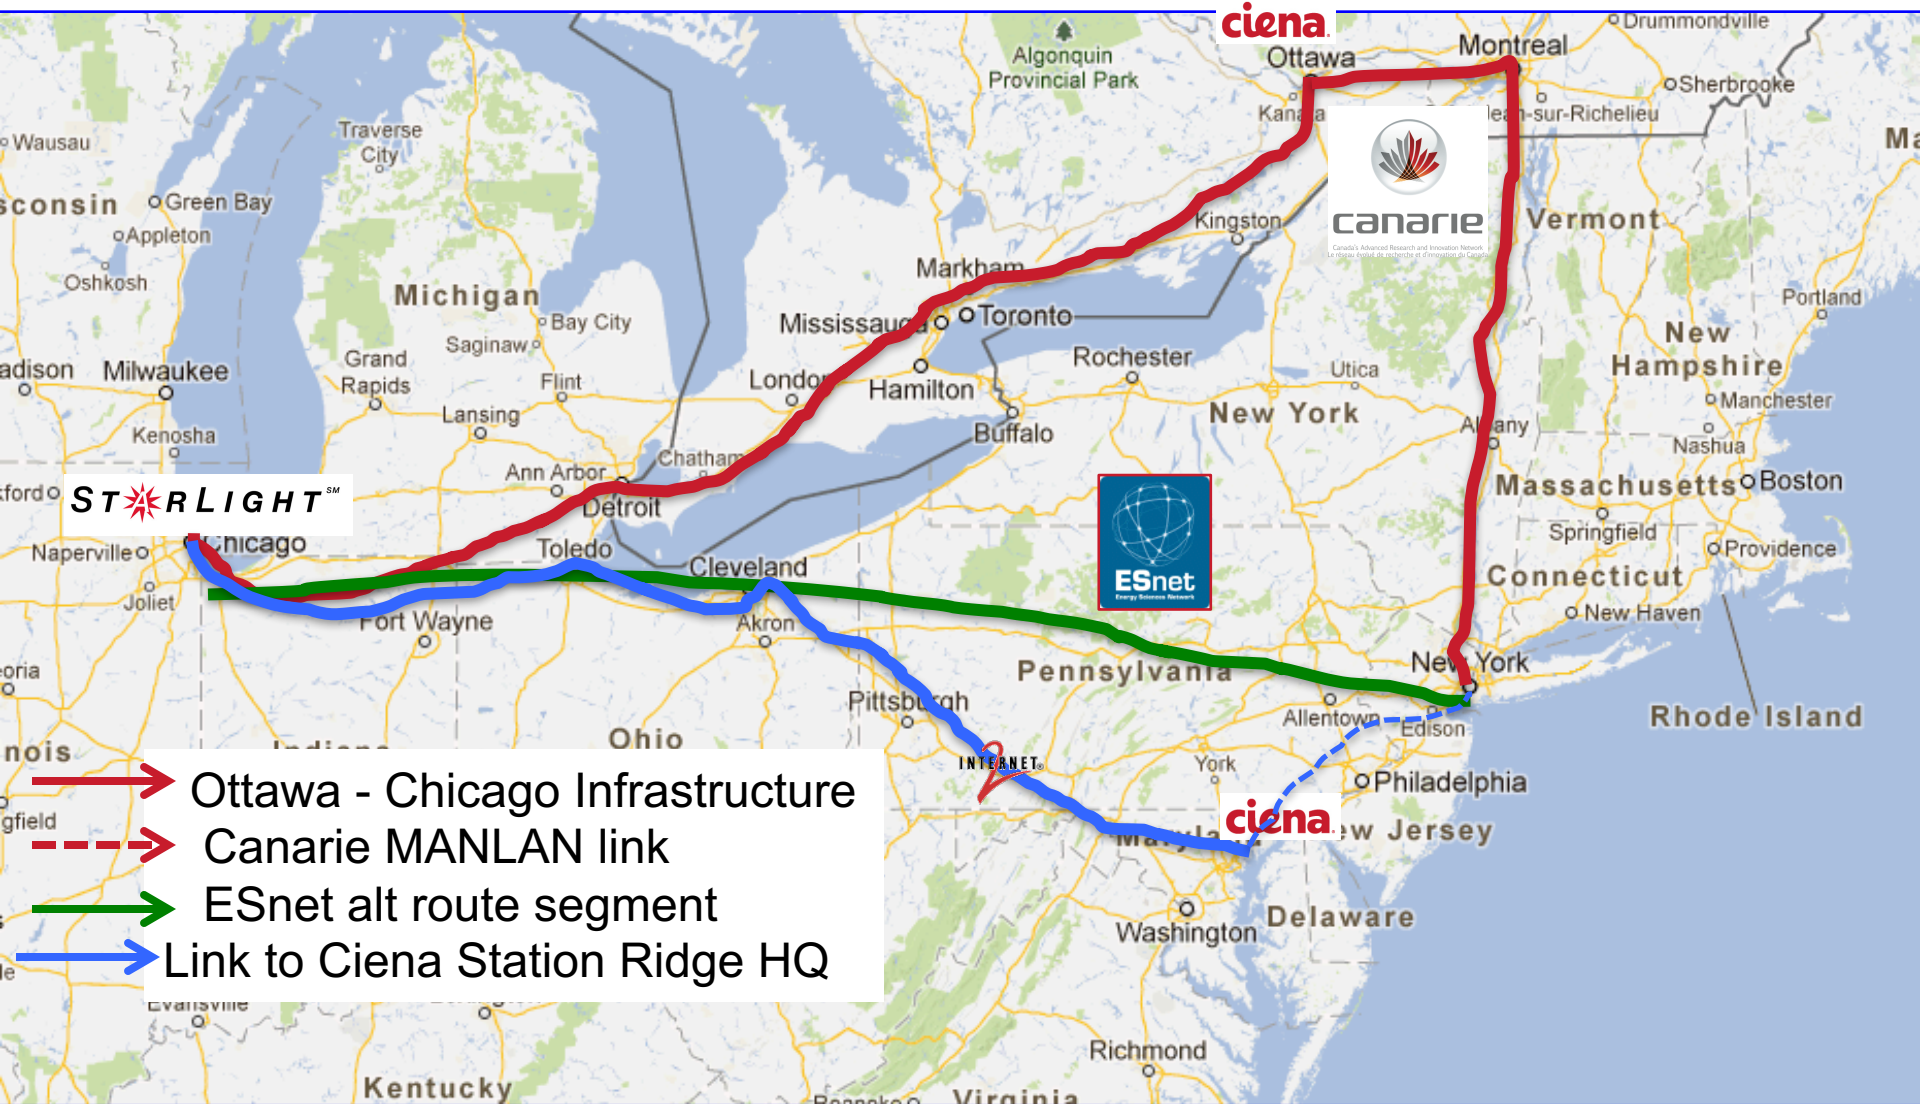

- Ottawa - Chicago Infrastructure
- - - → Canarie MANLAN link
- ESnet alt route segment
- Link to Ciena Station Ridge HQ

# CENI, International extension to University of Amsterdam

Research Triangle Project. Operation Spring of 2015

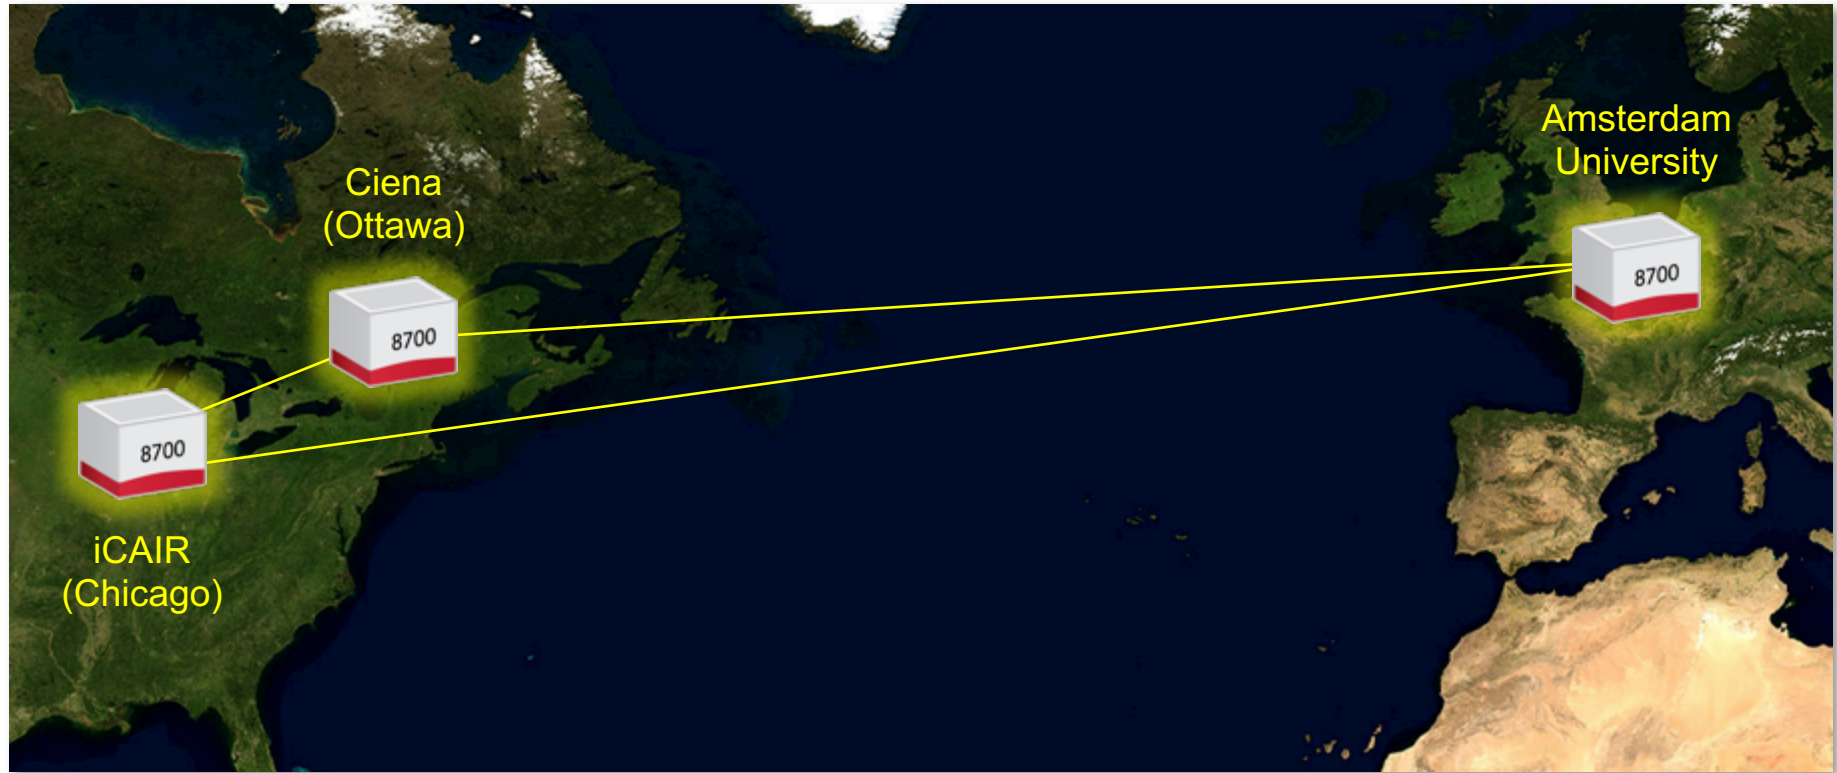

National Science Foundations ExoGENI racks, installed at UvA (Amsterdam), Northwestern University (Chicago) and Ciena's labs (Ottawa), are connected via a high performance 100G research network and trans-Atlantic network facilities using the Ciena 8700 Packetwave platform. This equipment configuration is used to create a computational and storage test bed used in collaborative demonstrations.

# Position of demo @ SC15

## Objective

- To get a better understanding for cyber attack complexity by visually defend a network suffering from basic volumetric attacks.
- To find a way to visualize future research in automated response.

## Demo highlights

- Pre-programmed attack scenarios that are able to show defense functions.
- Virtual sales + income from web services
- Defense cost

## DDoS Defence functions.

- Filtering
- Blocking
- Resource Scaling

# Demo




Scenario: Single service DDoS

Start

Reset


04:00.0

Service revenue Server 1 Server 2

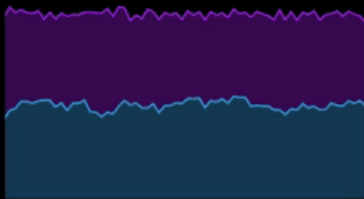

## Summary

SERVICE REVENUE 137 (sales per second)  
NETWORK COST \$13000  
BANDWIDTH 2600Mbit/s  
USAGE 164Mbit/s  
LOSS 824kbit/s

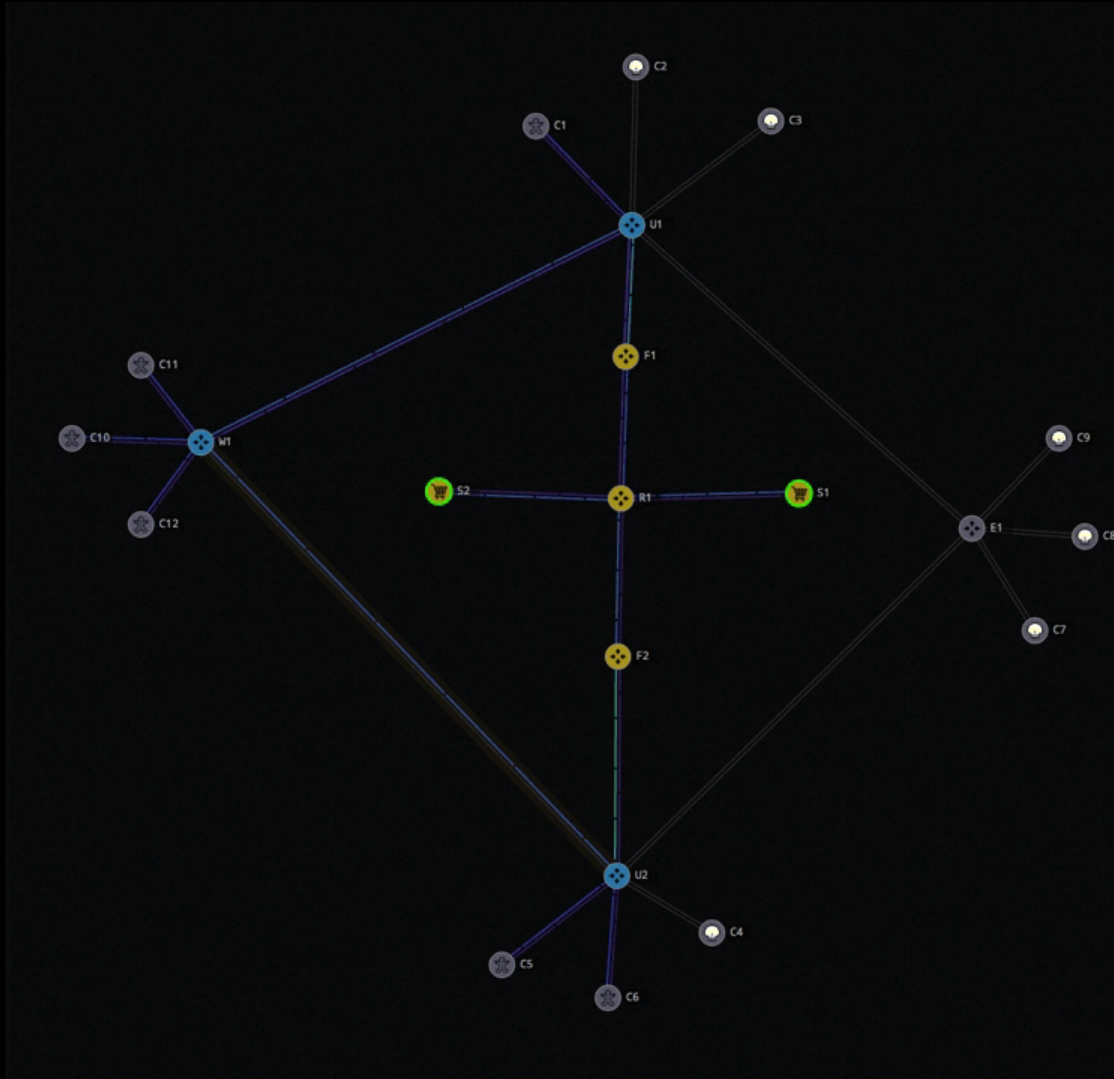

## Link10


SOURCE west-r1  
TARGET upstream-r2  
BANDWIDTH 100000000  
LABEL 10  
STATUS started  
RATE 50Mbit/s  
STATE up

RX: 8Mbit/s

TX: 0bit/s

## Link10

State Rate Filter



AIR FRANCE KLM



UNIVERSITY OF AMSTERDAM

# Basic operating system loop

The screenshot displays a web browser window at localhost:4567/vi/7. The main content area shows a network graph with nodes labeled 13124, 13127, 13128, 13125, and 13126. The graph consists of several interconnected nodes forming a complex structure.

On the left side, there is a control panel with the following sections:

- Mode:** info, info edge, draw, delete node, delete edge
- Last result:** getting links
- new netapp**
- Zone:** eu-west-1a:  eu-west-1b:  eu-west-1c:  gbl-a:  gbl-b:  us-east-1a:  us-east-1b:  us-east-1c:  us-east-1d:  us-west-2a:  us-west-2b:  us-west-2c:  us-west-1a:  us-west-1c:  sa-east-1a:  sa-east-1b:  ap-northeast-1a:  ap-northeast-1b:  ap-southeast-1a:  ap-southeast-1b:
- Use canvas to change configuration**
- Create generator**
- number of vms
  - preferential attachment algorithm (take into account geoiip)

At the bottom left, there is a terminal window showing network-related commands and outputs:

```
netapps: 13126  
127.0.0.1 - - [26  
get links: {"vid"  
links: ["13135",  
127.0.0.1 - - [26  
local request: lo  
add link: {src=>  
args: ["rudolf@st  
enqueue: queue:ne
```

At the bottom right, there is a code editor window showing Mathematica code for graph operations:


```
Start the dynamics, such that an updated graph will trigger the function call and display the graph when the network changes.  
In[166]:= Dynamic[ResolveArticulationVertices[network]]  
Dynamic[MyPlot[network]]  
Out[166]= Null  
Out[167]= {  
  {1-2-3-4-5}, {1-2-3-4-5},  
  {1-2-3-4-5}, {1-2-3-4-5},  
  {5-4-3-2-1}  
}  
  
network = Graph[{1 <-> 2, 2 <-> 3, 3 <-> 1, 3 <-> 4, 4 <-> 5, 5 <-> 6}];  
GraphPlot[network, VertexLabeling -> True, DirectedEdges -> False];
```

# Service Provider Group framework

*A Service Provider Group (SPG) is an organisation structure providing a defined service only available if its members collaborate.*


*Examples:*

Internet2NET+

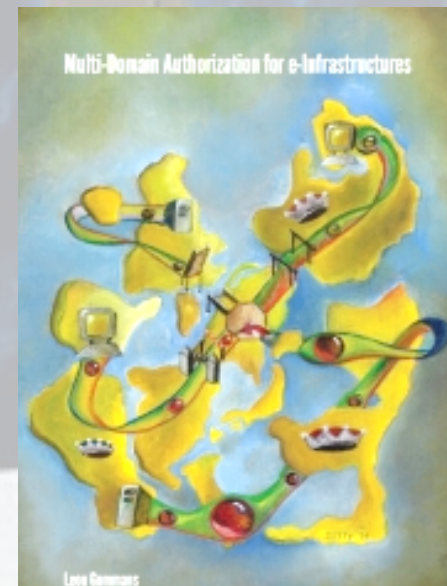

Lisa Gommers

# Envisioned role of the SPG: define slice archetypes?

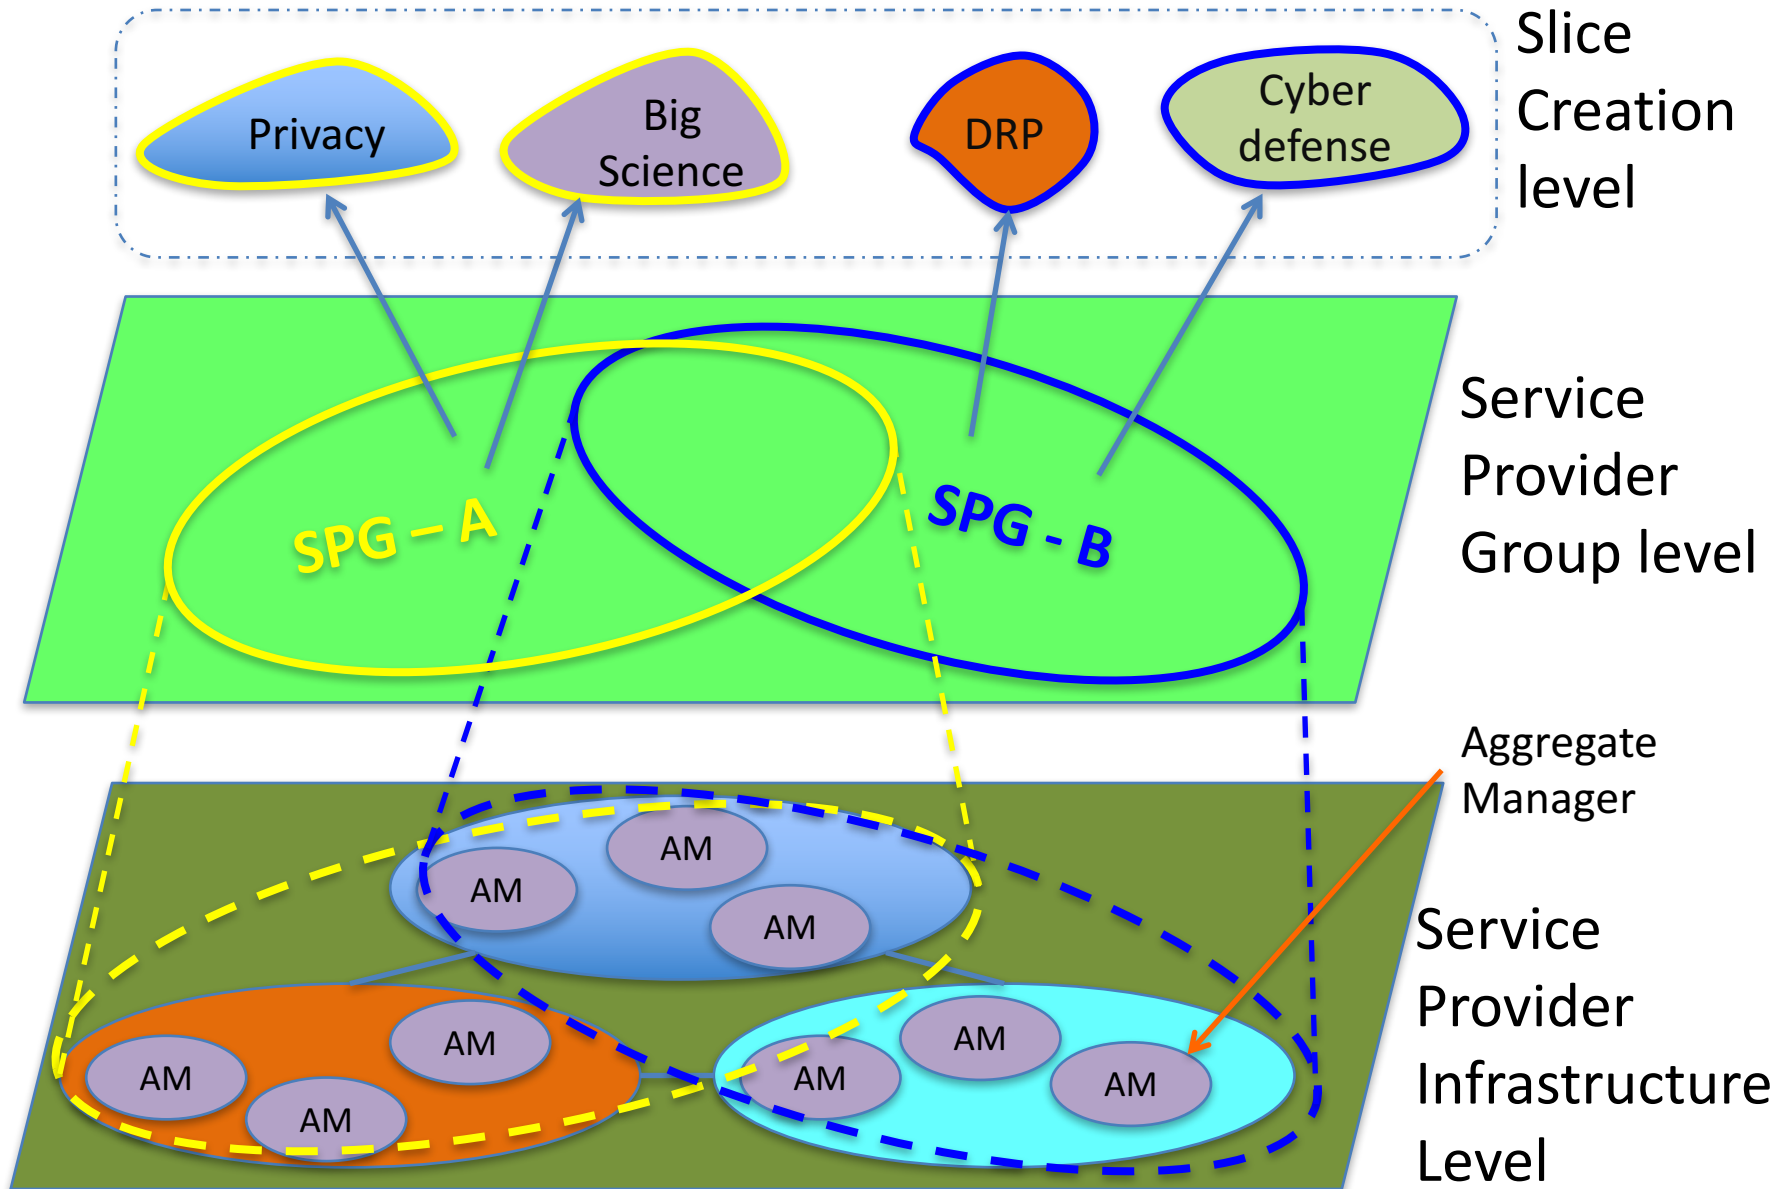




# Agent Based Modelling Framework

	Main component
Signal layer	Message / Act
Action layer	Action / Activity
Intentional layer	Intention
Motivational layer	Motive

In our model, we refer to four layers of components:


- the signal layer— describes **acts**, side-effects and failures showing outcomes of actions in a topology.
- the action layer—**actions**: performances that bring a certain result,
- the intentional layer—**intentions**: commitments to actions, or to build up intentions,
- the motivational layer—**motives**: events triggering the creation of intentions.

# Simplified Eduroam case at signalling layer

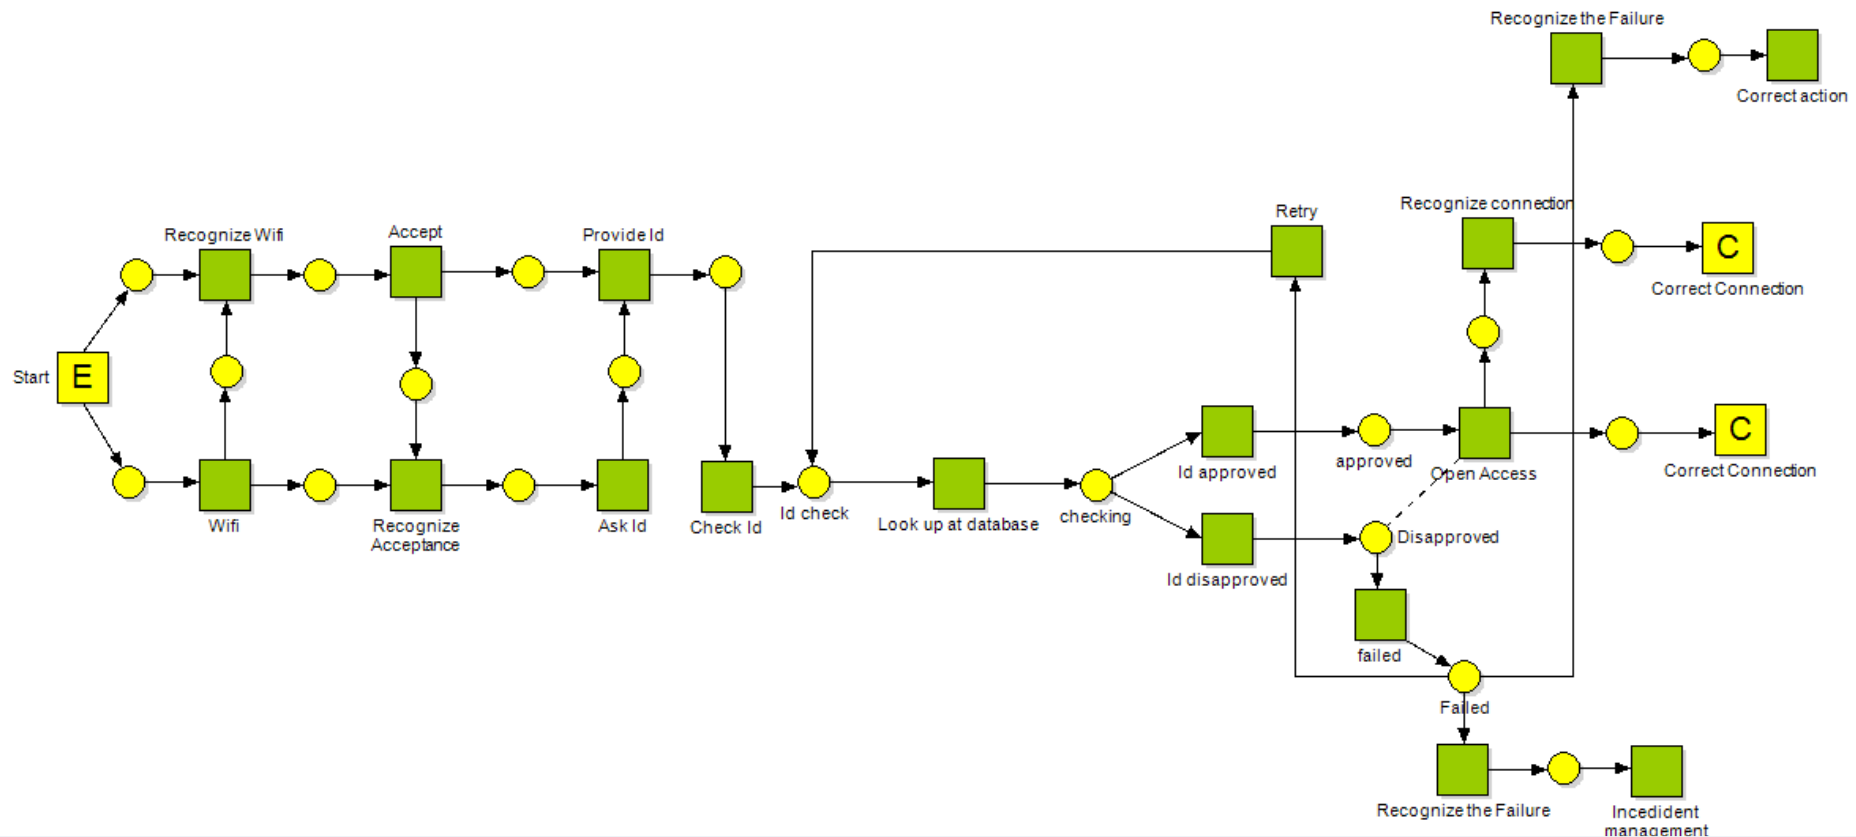

Petri net of EduRoam Case  
(first step)

# Describing Intentions, Motivations and Actions

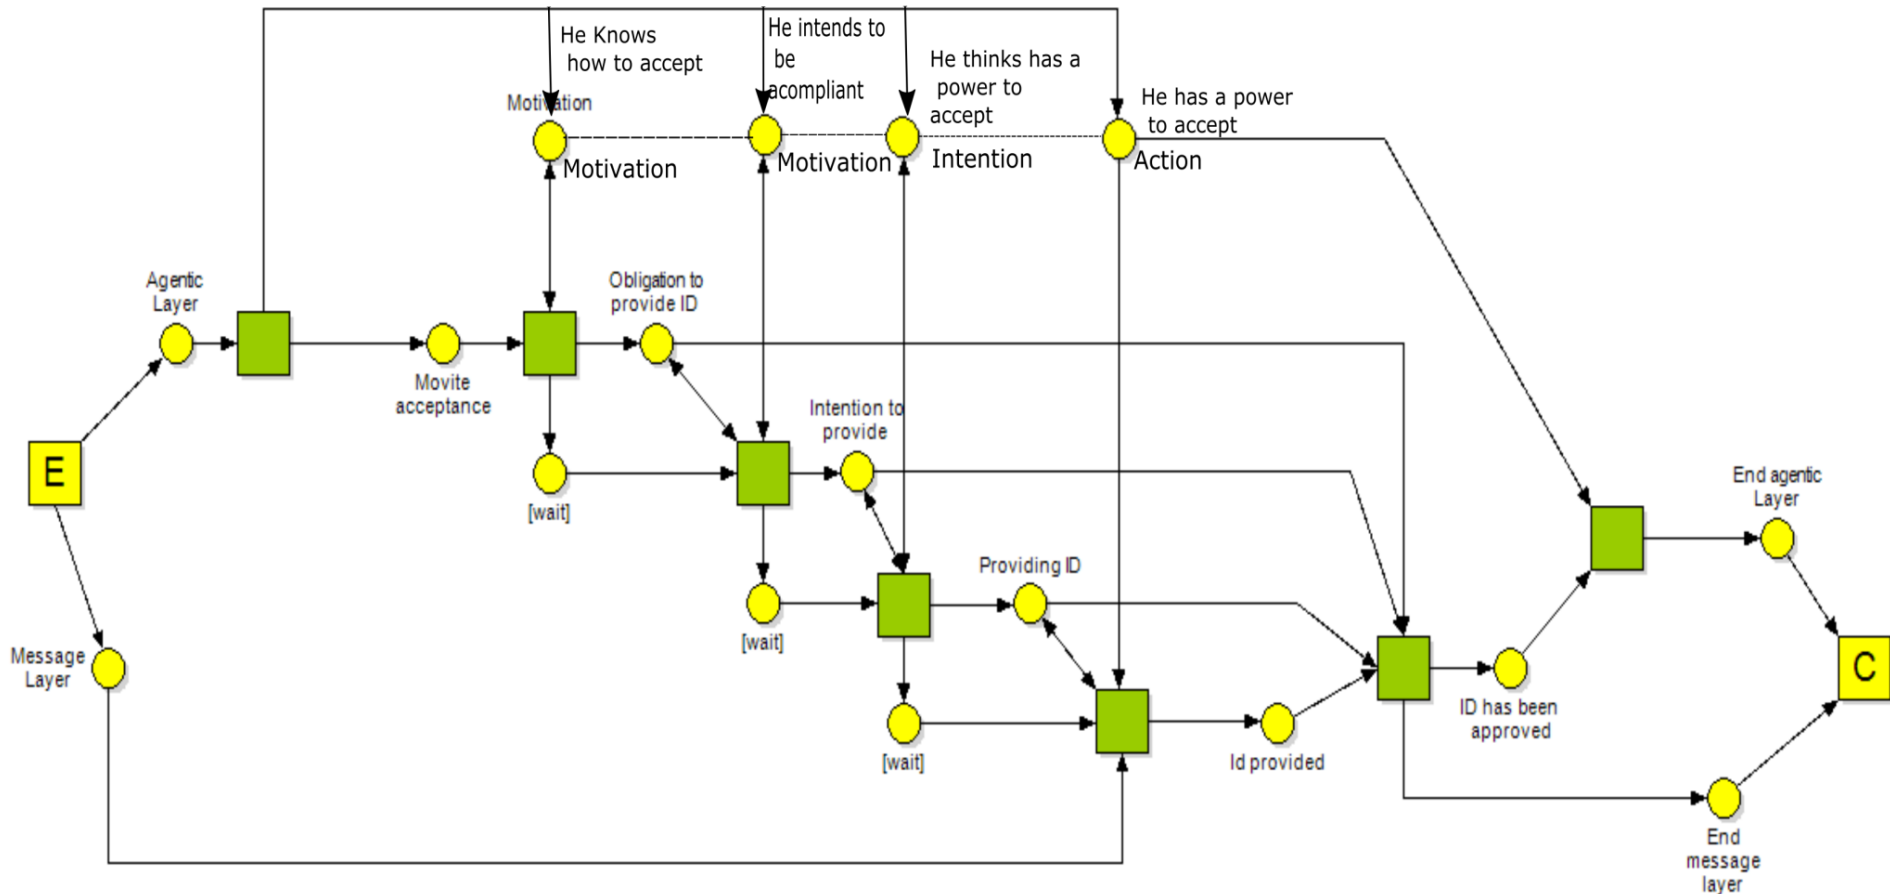

**Petri net of EduRoam Case**

# Mission

*Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?*

- *Capacity*
  - *Bandwidth on demand, QoS, architectures, photonics, performance*
- **Capability**
  - ***Programmability, virtualization, complexity, semantics, workflows***
- *Security*
  - *Anonymity, integrity of data in distributed data processing*
- *Sustainability*
  - *Greening infrastructure, awareness*
- **Resilience**
  - ***Systems under attack, failures, disasters***





# Tera-Thinking

- What constitutes a Tb/s network?
- think back to teraflop computing!
  - MPI turns a room full of pc's in a teraflop machine
- massive parallel channels in hosts, NIC's
- TeraApps programming model supported by
  - TFlops -> MPI / Globus / Cloud
  - TBytes -> DAIS / MONETdb ...
  - TPixels -> SAGE
  - TSensors -> LOFAR, LHC, LOOKING, CineGrid, ...
  - Tbit/s -> OpenFlow & SDN
  - -> Virtualized Programmable Networks

# User Programmable Virtualized Networks allows the results of decades of computer science to handle the complexities of application specific networking.

- The network is virtualized as a collection of resources
- UPVNs enable network resources to be programmed as part of the application
- Mathematica, a powerful mathematical software system, can interact with real networks using UPVNs

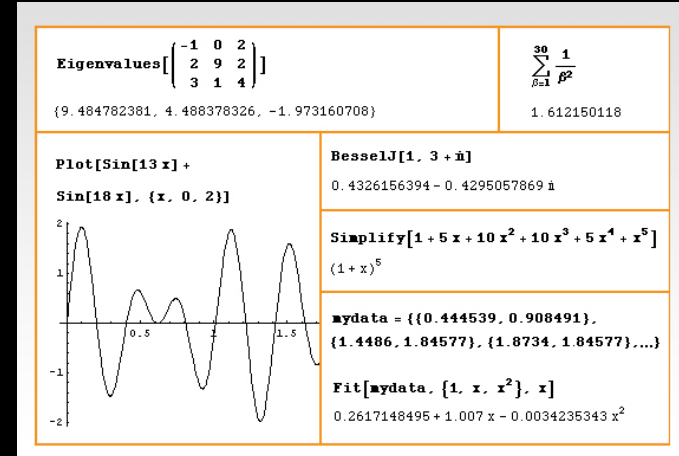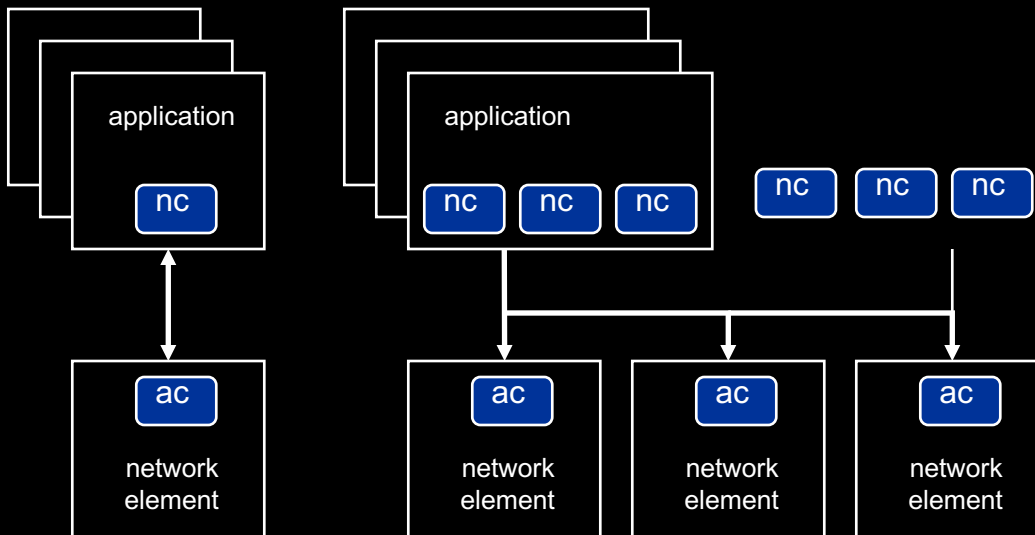

# Mathematica enables advanced graph queries, visualizations and real-time network manipulations on UPVNs

Topology matters can be dealt with algorithmically  
Results can be persisted using a transaction service built in UPVN

## Initialization and BFS discovery of NEs

```
Needs["WebServices`"]
<<DiscreteMath`Combinatorica`
<<DiscreteMath`GraphPlot`
InitNetworkTopologyService["edge.ict.tno.nl"]


Available methods:
{DiscoverNetworkElements,GetLinkBandwidth,GetAllIpLinks,Remote,
NetworkTokenTransaction}

Global`upvnverbose = True;

AbsoluteTiming[nes = BFSDiscover["139.63.145.94"]][[1]]

AbsoluteTiming[result = BFSDiscoverLinks["139.63.145.94", nes][[1]]

Getting neighbours of: 139.63.145.94
Internal links: {192.168.0.1, 139.63.145.94}
(...)
Getting neighbours of:192.168.2.3
Internal links: {192.168.2.3}
```

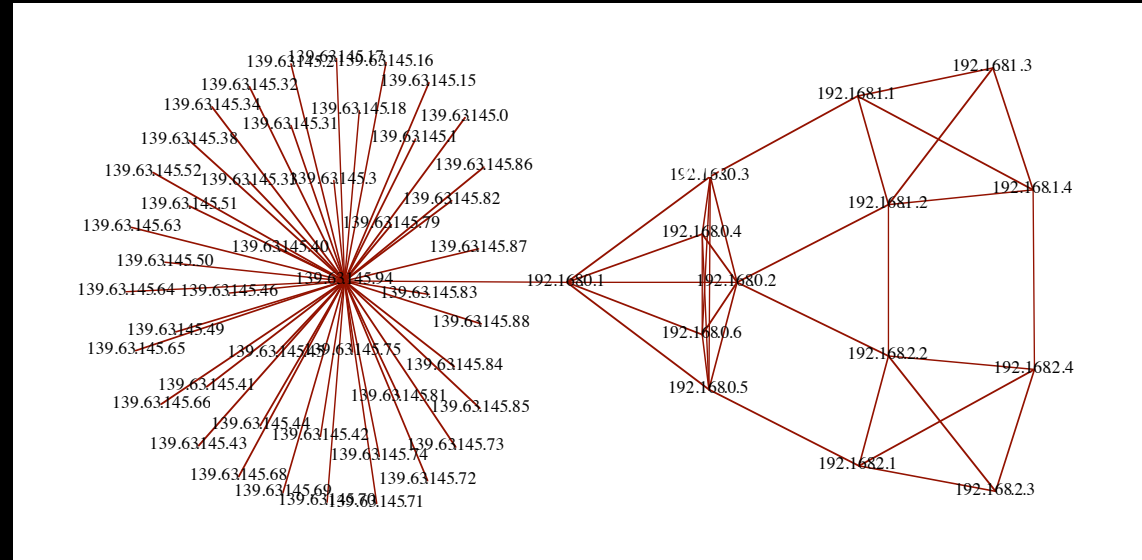


## Transaction on shortest path with tokens

```
nodePath = ConvertIndicesToNodes[
ShortestPath[
g,
Node2Index[nids, "192.168.3.4"],
Node2Index[nids, "139.63.77.49"]],
nids];
Print["Path: ", nodePath];
If[NetworkTokenTransaction[nodePath, "green"]==True,
Print["Committed"], Print["Transaction failed"]];

Path:
{192.168.3.4,192.168.3.1,139.63.77.30,139.63.77.49}

Committed
```

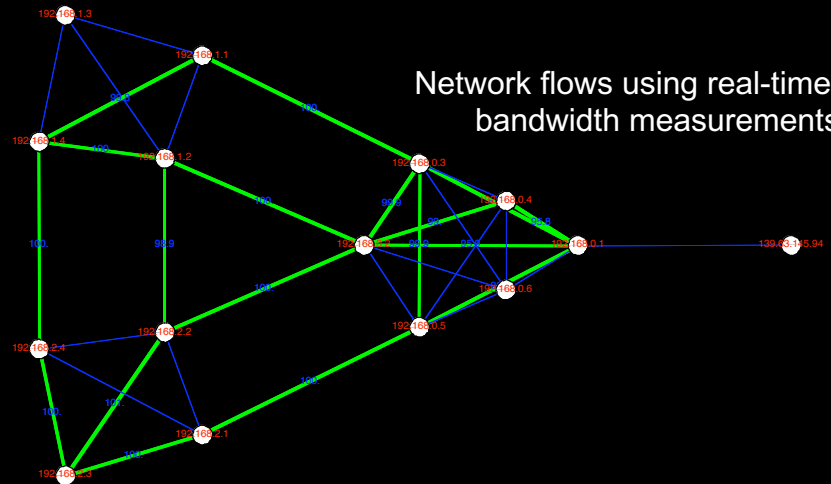

# Basic operating system loop

The image shows a web browser window displaying a network simulation interface. The browser address bar shows `localhost:4567/vi/7`. The page content includes a list of netapps, a mode selection menu, and a graph visualization. The graph shows a network of nodes and edges, with labels like 13124, 13127, 13128, 13125, and 13126. Below the graph, there is a 'Create generator' section with a list of parameters.

netapps (provider, zone)  
connections

Mode:  
info  
info edge  
draw  
delete node  
delete edge  
Last result:  
getting links  
new netapp  
Zone:  
eu-west-1a:  eu-west-1b:  eu-west-1c:  gbl-a:   
gbl-b:  us-east-1a:  us-east-1b:  us-east-1c:  us-east-1d:  us-west-2a:  us-west-2b:  us-west-2c:   
us-west-1a:  us-west-1c:  sa-east-1a:  sa-east-1b:   
ap-northeast-1a:  ap-northeast-1b:  ap-southeast-1a:   
ap-southeast-1b:

Use canvas to change configuration

Create generator

- number of vms
- preferential attachment algorithm (take into account geoiip)

```
netapps: 1 13124  
127.0.0.1 - - [26  
get links: {"vid"  
links: ["13135",  
127.0.0.1 - - [26  
local request: lo  
add link: {src=>  
args: ["rudolf@st  
enqueue: queue:ne
```

```
In[2]:= Position[{a, s  
Out[2]:= {{1, 3}, {2, 1},  
Find all positions at  
In[1]:= Position[{1 + x  
Out[1]:= {{1, 2}, {3}, {4  
Find only those down
```

```
In[2]:= {EdgeQ[%, 1 -> 2], EdgeQ[%, 2 -> 1], Edg  
Out[2]:= {True, True, False}
```

```
Test directed edges:  
In[1]:= CycleGraph[7, DirectedEdges -> True, V  
EdgeStyle -> Arrowheads[Medium], Edg
```

```
Start the dynamics, such that an updated graph will trigger the function call and display the graph when the network changes.  
In[166]:= Dynamic[ResolveArticulationVertices[network]]  
Dynamic[MyPlot[network]]  
Out[166]= Null  
Out[167]= {  
1 2 3 4 5, 1 2 3 4 5,  
1 2 3 4 5, 1 2 3 4 5,  
5 4 3 2 1 }  
network = Graph[{1 -> 2, 2 -> 3, 3 -> 1, 3 -> 4, 4 -> 5, 5 -> 6}];  
GraphPlot[network, VertexLabeling -> True, DirectedEdges -> False];
```



# Mission

*Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?*

- *Capacity*
  - *Bandwidth on demand, QoS, architecture, economics, performance*
- *Capability*
  - *Programmability, virtualization, complexity, semantics, workflows*
- *Security*
  - *Confidentiality, integrity of data in distributed data processing*
- *Sustainability*
  - *Greening infrastructure, awareness*
- *Resilience*
  - *Systems under attack, failures, disasters*

**SMART**





I want to





“Show **Big Bug Bunny** in **4K** on **my Tiled Display** using **green** Infrastructure”

- **Big Bugs Bunny** can be on multiple servers on the Internet.
  - Movie may need processing / recoding to get to **4K** for **Tiled Display**.
  - Needs deterministic **Green** infrastructure for Quality of Experience.
  - Consumer / Scientist does not want to know the underlying details.
- His refrigerator also just works!

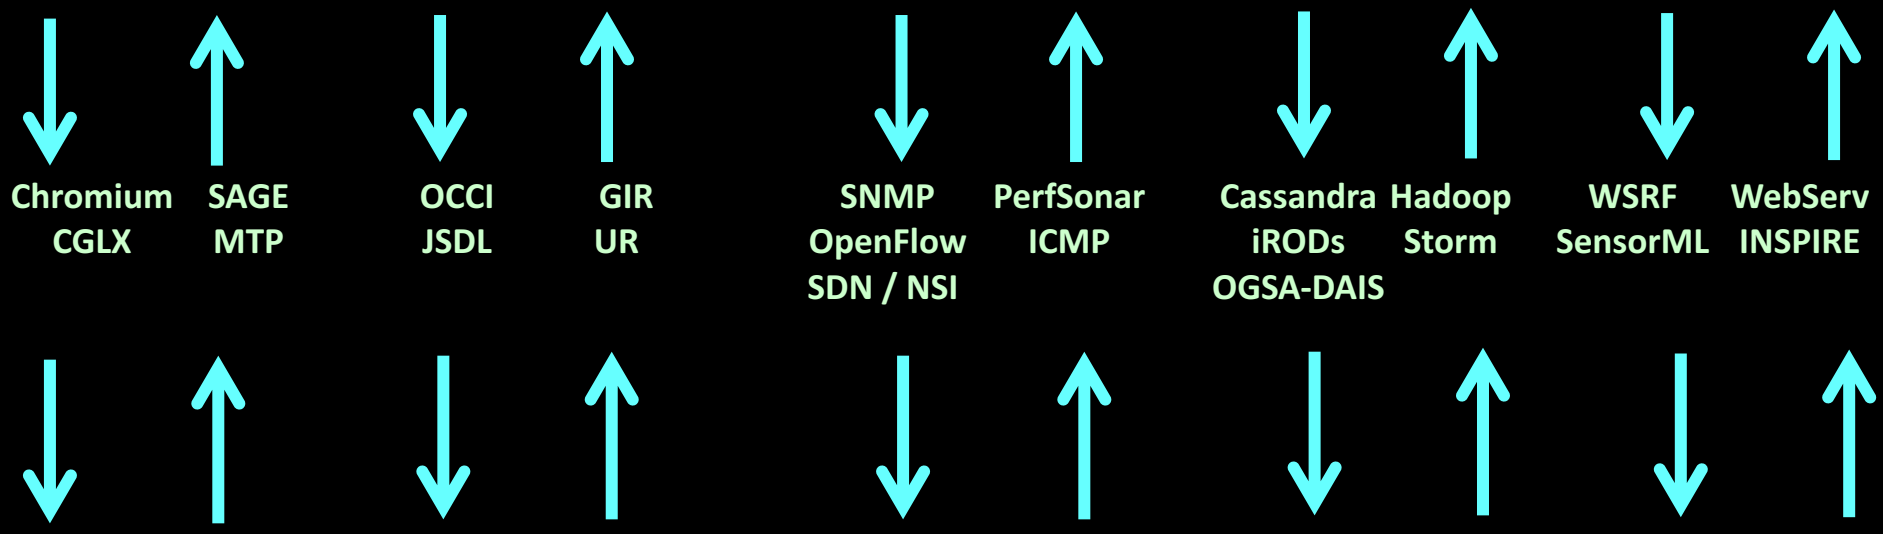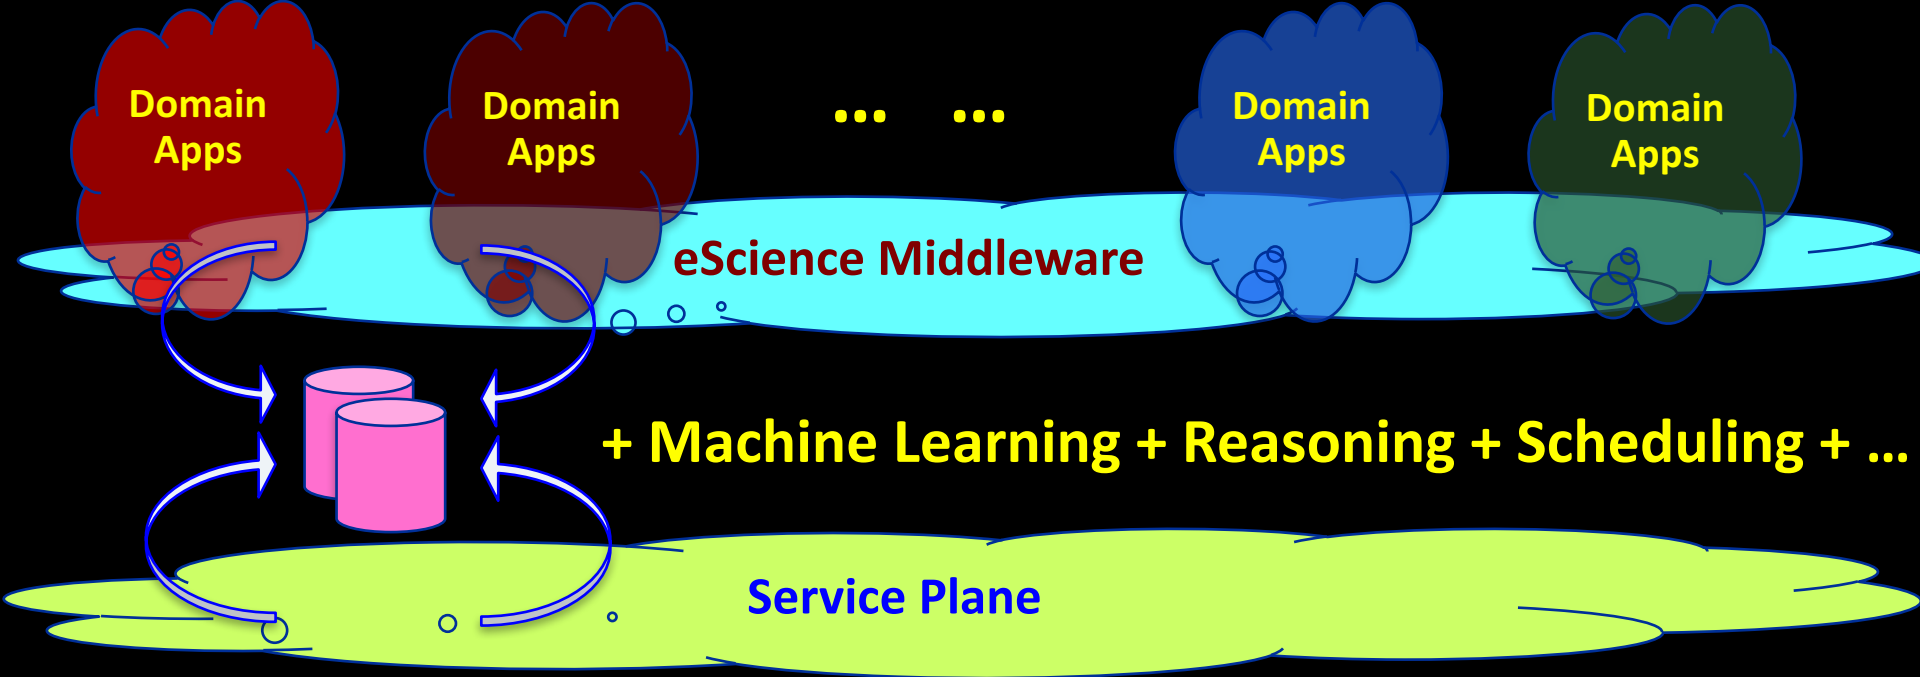

GRID/Cloud Computing

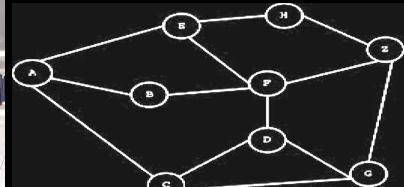

# The Big Data Challenge

Doing Science

ICT to enable Science

Wisdom

Knowledge to act

Information

Data  
a.o. from ESFRI's

e-IRG

Workflows  
Schedulers to act

OWL

XML, RDF, rSpec,  
SNMP, Java based, etc.



# The Big Data Challenge

Doing Science

ICT to enable Science

Wisdom

Scientists live here!

e-IRG

Knowledge

Science App Store?

Workflows  
Schedulers

MAGIC DATA CARPET

curation - description - trust - security - policy - integrity

Information



OWL

Data


a.o. from ESFRI's




XML, RDF, rSpec,  
SNMP, Java based, etc.




GRID/CLOUD



# TimeLine

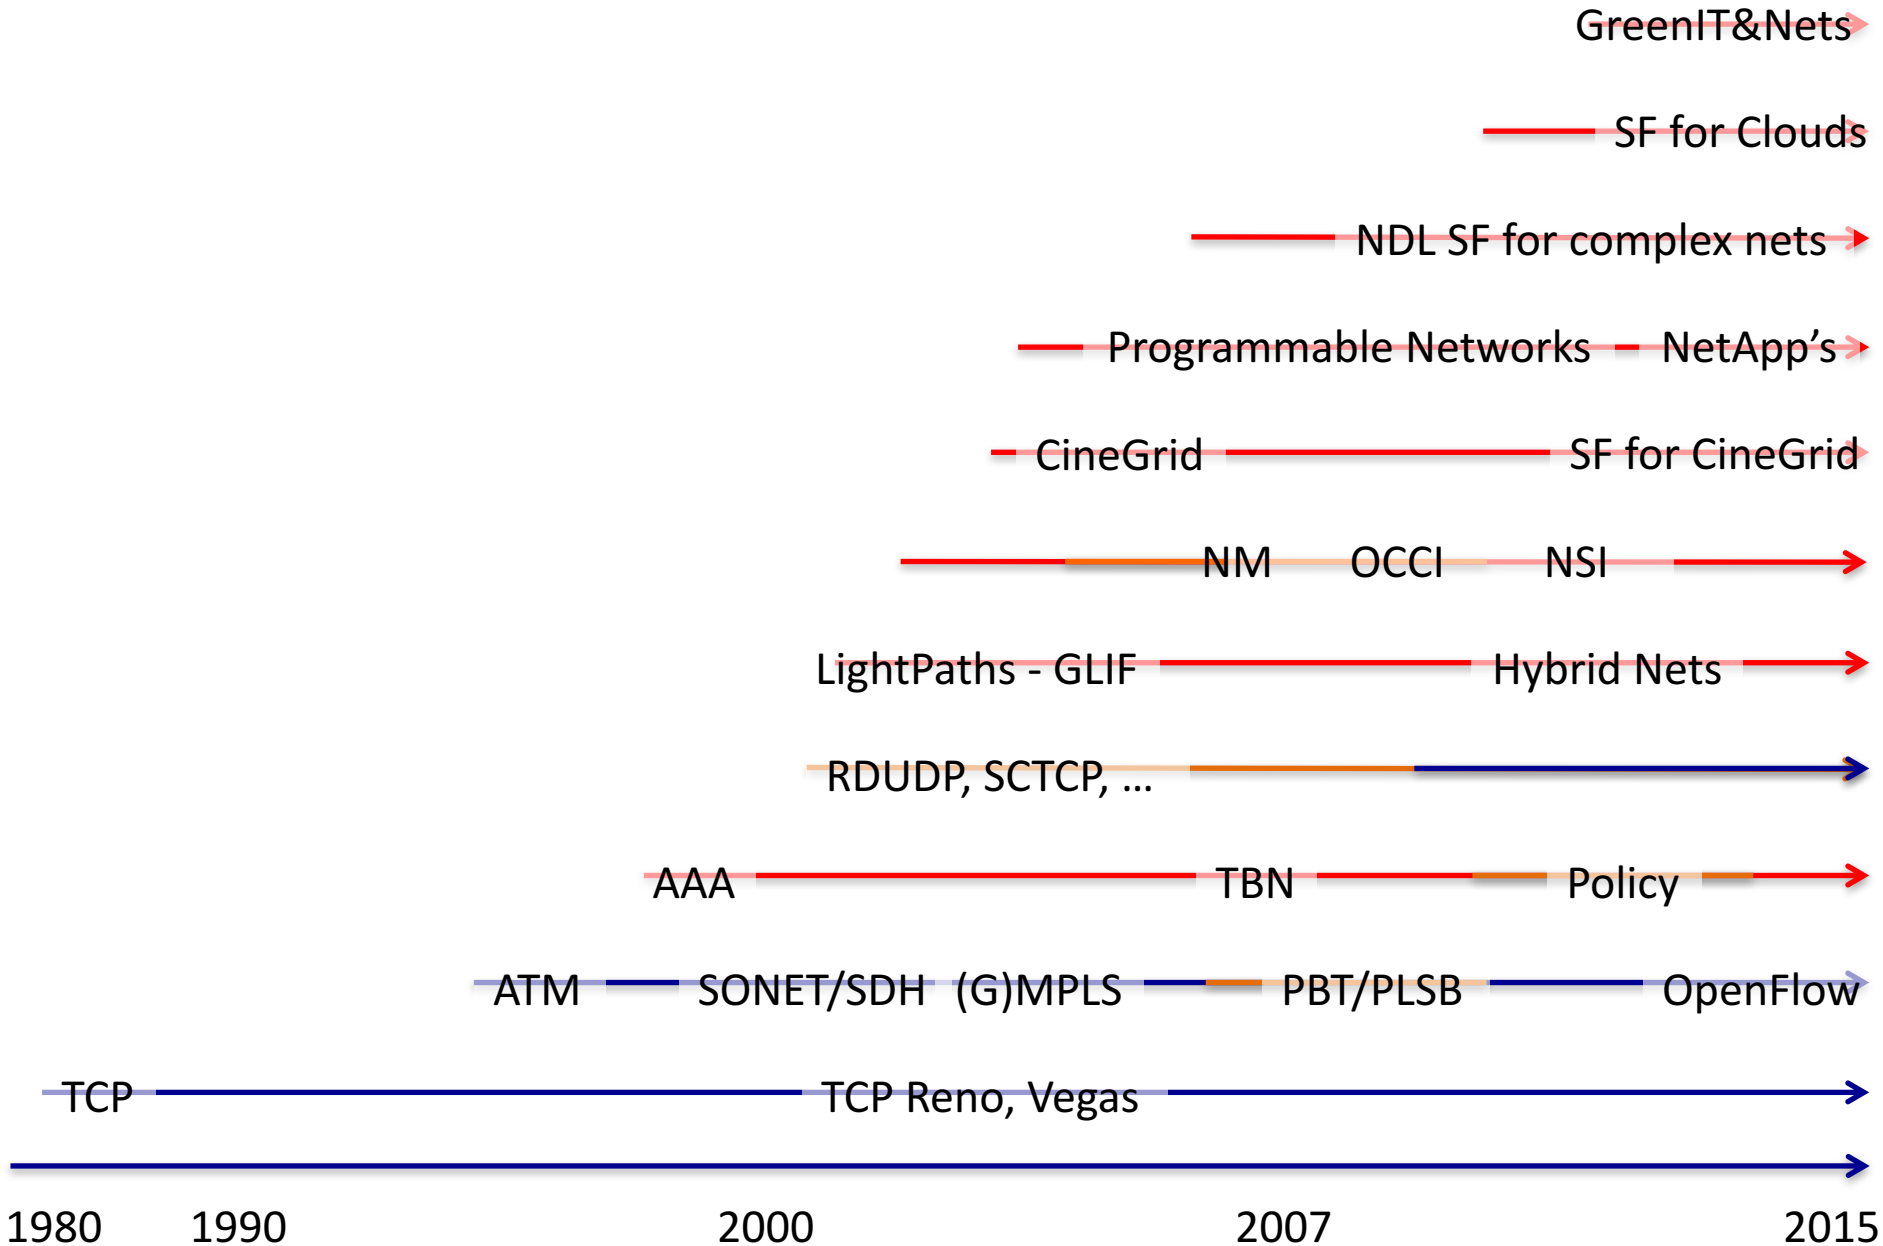

# Timeline

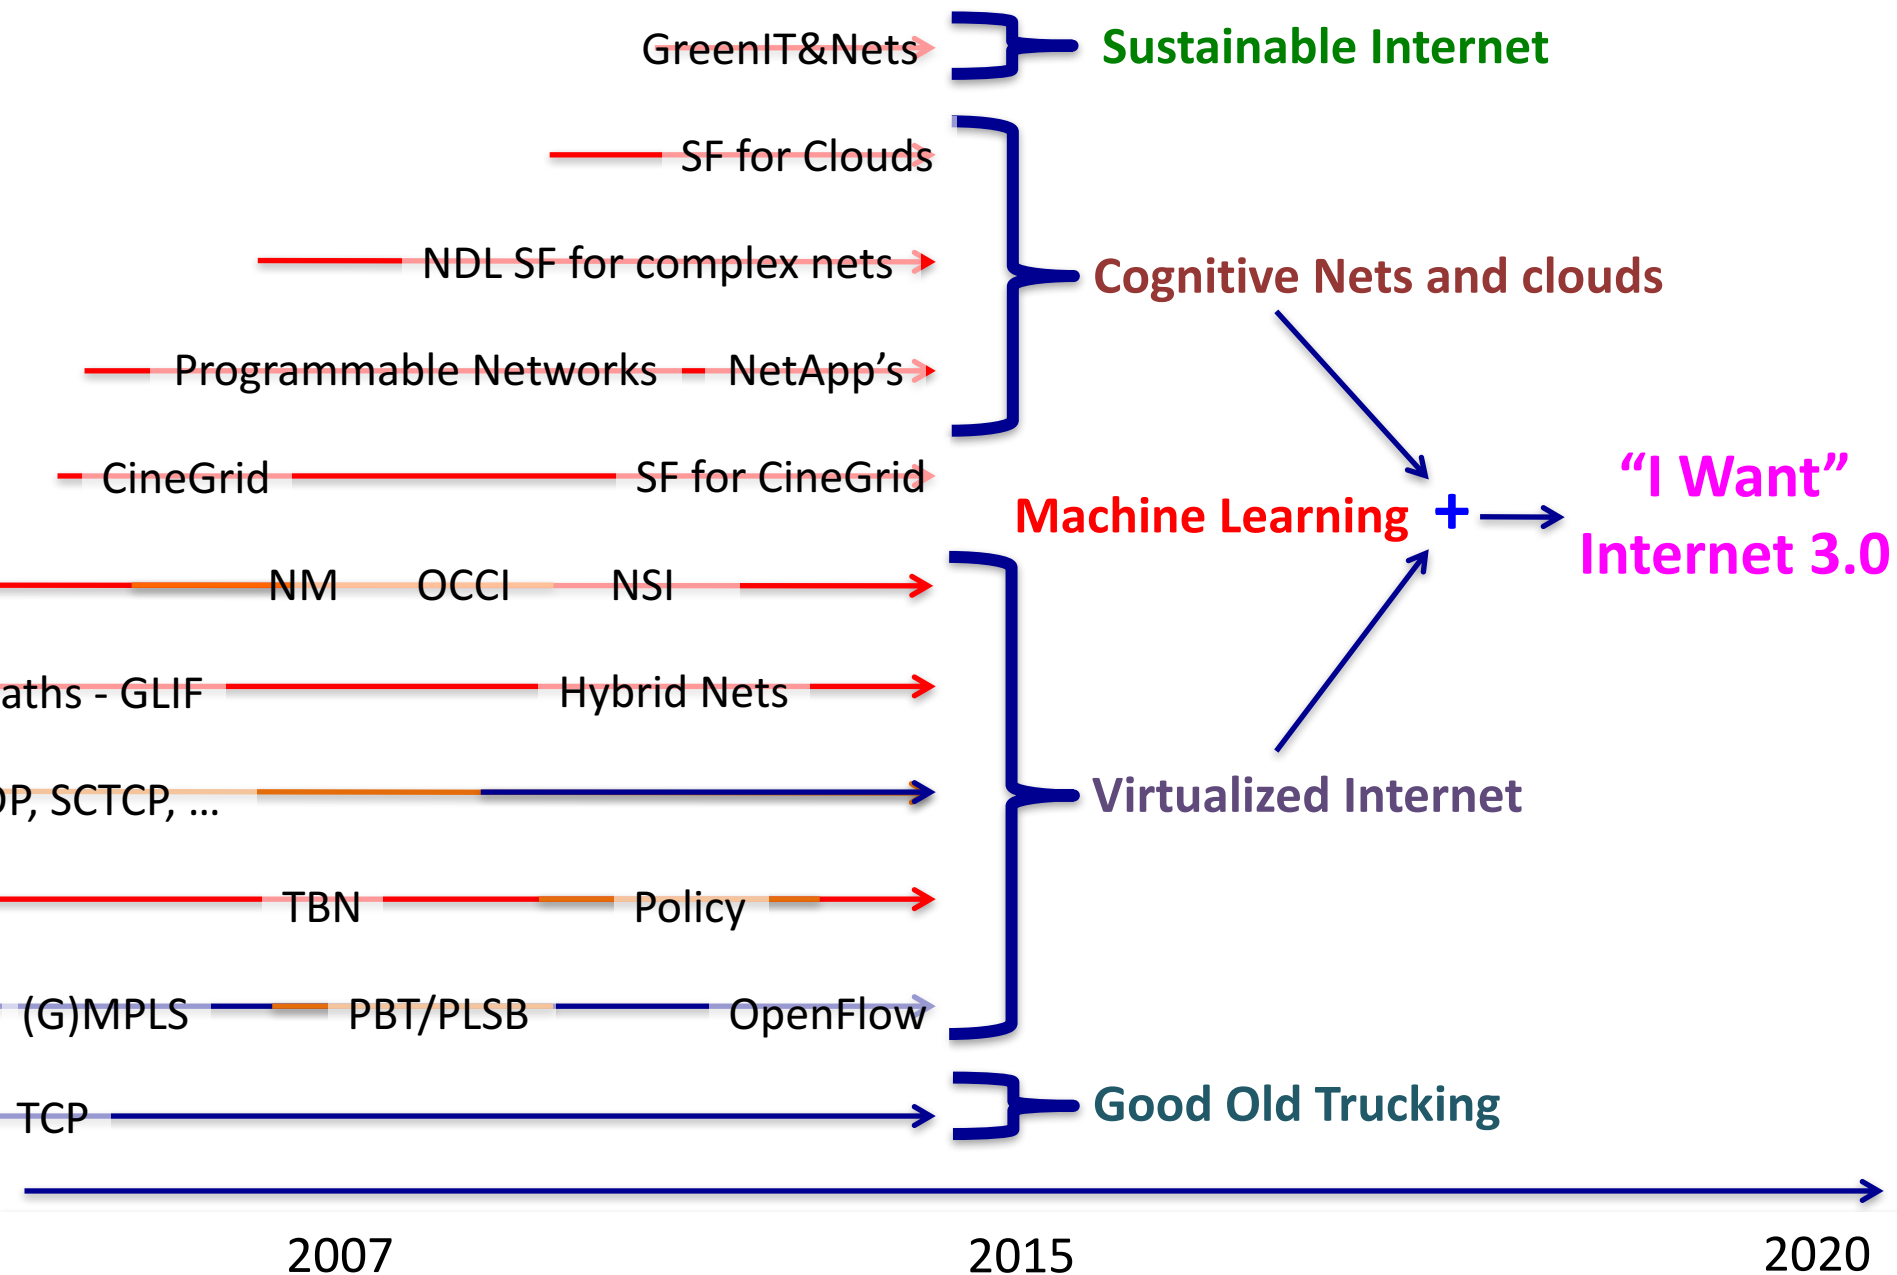

# TimeLine

■ Sustainable Internet

■ Cognitive Nets and clouds

Machine Learning +

■ Virtualized Internet

■ Good Old Trucking

“I Want”  
Internet 3.0



I  
retire

2020


2040



# TimeLine

**Compute**

**Networks**

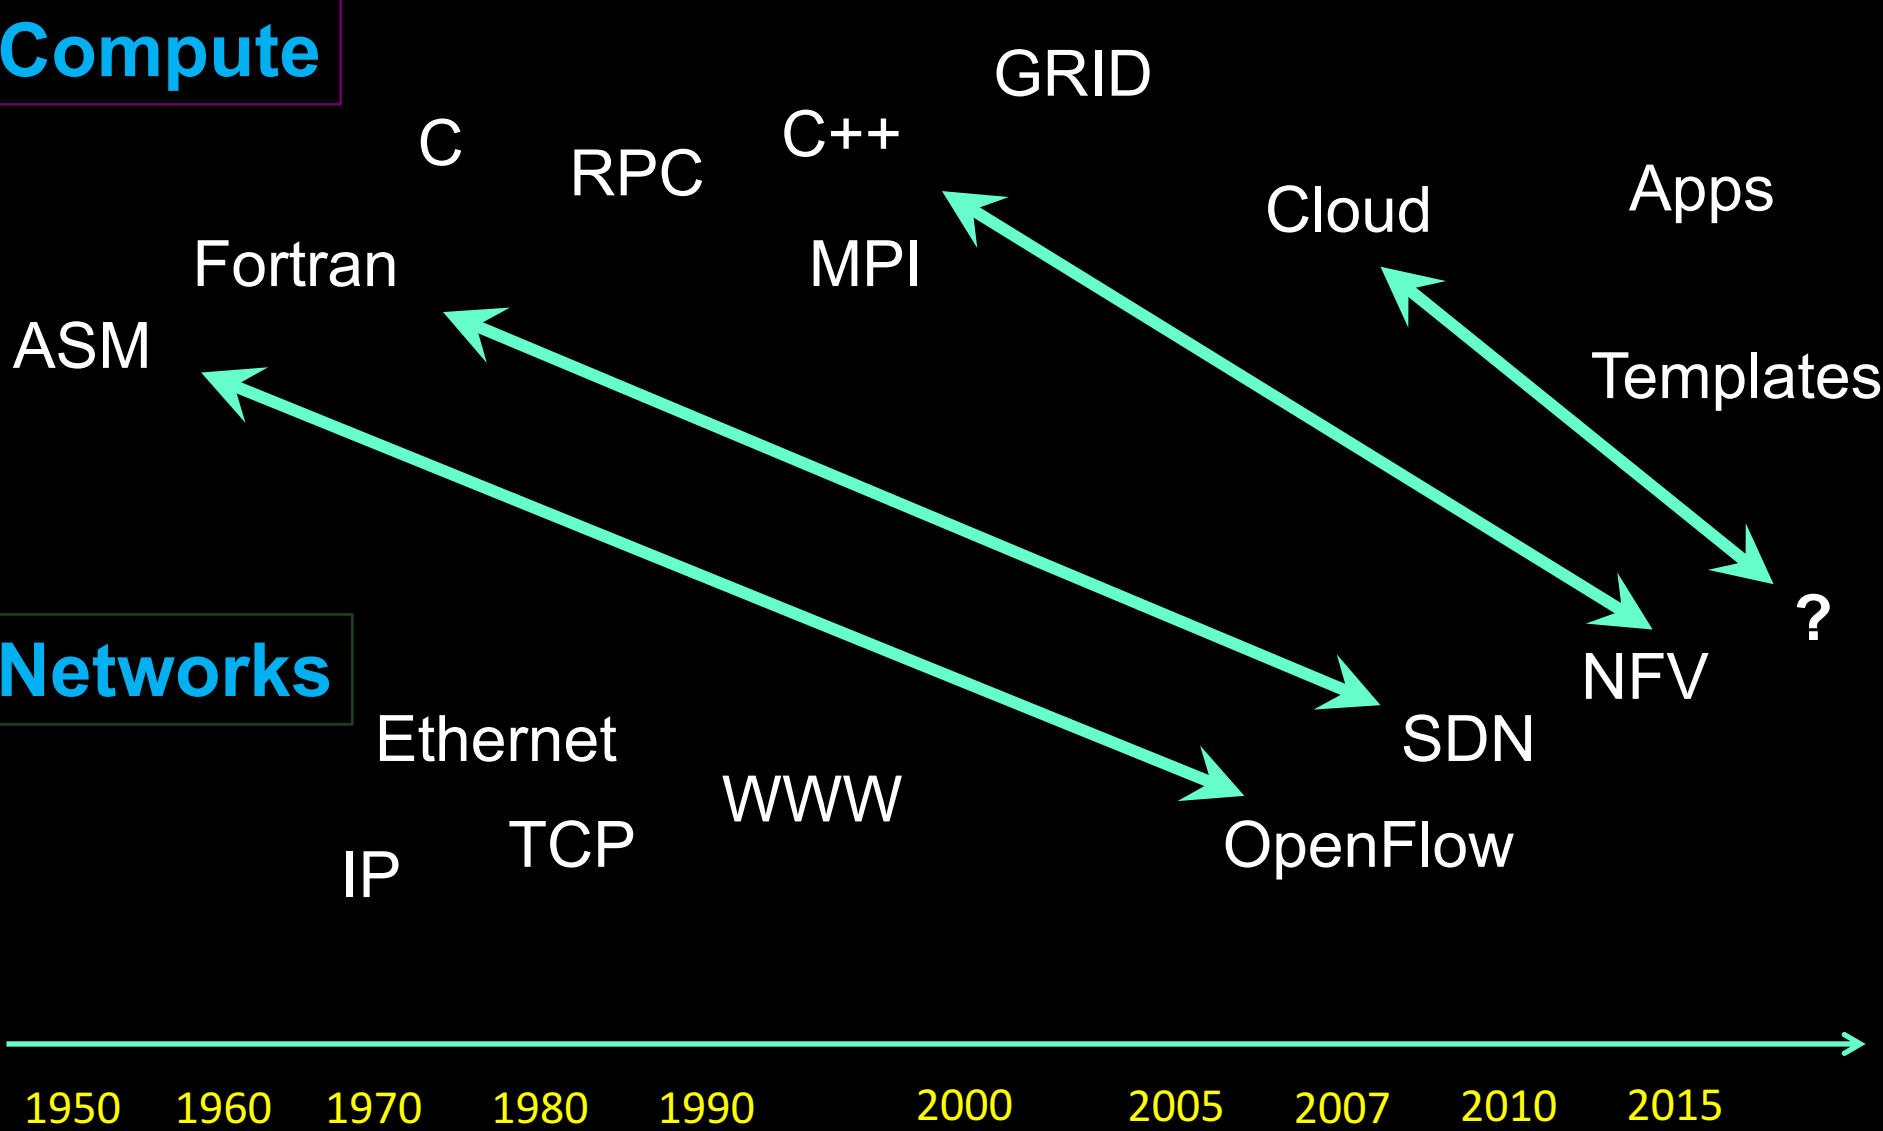

# The constant factor in our field is Change!

The 50 years it took Physicists to find one particle, the Higgs,  
we came from:

Assembler, Fortran, COBOL, VM, RSX11, Unix, c, Pascal,  
SmallTalk, DECnet, VMS, TCP/IP, c++, Internet, WWW,  
ATM, Semantic Web, Photonic networks, Google, Grid,  
Phyton, FaceBook, Twitter, Cloud, SDN, Data^3, App's

to:

DDOS attacks destroying Banks and BitCoins!

Conclusion:

Need for Safe, Smart, Resilient Sustainable Infrastructure.

Why?



**Because we can!**

# Questions?

Arie Taal  
Paola Grosso Ana Oprescu  
Cees de Laat Marc Makkes Ralph Koning  
Bas Terwijn Leon Gommans Fahimeh Alizadeh  
Pieter Adriaans Cosmin Dumitru Karst Koymans  
Yuri Demchenko Rob Meijer Karel van der Veldt  
Rudolf Strijkers Miroslav Zivkovic Reggie Cushing  
Naod Duga Jebessa Spiros Koulouzis Hao Zhu Jan Sipke van der Veen  
Jaap van Ginkel Guido van 't Noordende Sander Klous  
Mikolaj Baranowski Steven de Rooij Jeroen van der Ham  
Ngo Tong Canh Souley Madougou Paul Klint  
Adianto Wibisono Magiel Bruntink  
Zhiming Zhao Anna Varbanescu Marijke Kaat  
Niels Sijm Hans Dijkman Gerben de Vries  
Adam Belloum Arno Bakker Marian Bubak  
Daniel Romao Erik-Jan Bos  
Peter Bloem

<http://delaat.net>

<http://sne.science.uva.nl>

<http://www.os3.nl/>


<http://sne.science.uva.nl/openlab/>

<http://pire.opensciencedatacloud.org>

<http://staff.science.uva.nl/~delaat/pire/>

<https://rd-alliance.org>

<http://envri.eu>



Data Science  
Research Center  
Amsterdam

Supported by:



# Mission

*Can we create smart and safe data processing infrastructures that can be tailored to diverse application needs?*

- *Capacity*
  - *Bandwidth on demand, QoS, architectures, photonics, performance*
- *Capability*
  - *Programmability, virtualization, complexity, semantics, workflows*
- *Security*
  - *Anonymity, integrity of data in distributed data processing*
- ***Sustainability***
  - ***Greening infrastructure, awareness***
- *Resilience*
  - *Systems under attack, failures, disasters*

